


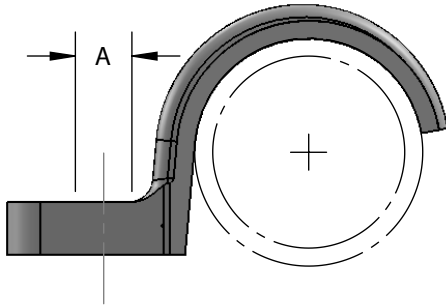

|                     |                                                                                                                                                   |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials/Finishes: | Electro-Galvanized Malleable Iron (126G)                                                                                                          |
| Variants:           | N/A                                                                                                                                               |
| Service:            | Designed for the support of conduit, cable or pipe on walls or sides of beams. Not recommended for horizontal use on ceilings or bottom of beams. |
| Approvals:          | N/A                                                                                                                                               |
| Ordering:           | Specify figure number and pipe size.                                                                                                              |
| Notes:              | N/A                                                                                                                                               |

| PIPE SIZE | PIPE/CABLE/CONDUIT OD | HOLE DIA A | BOLT/SCREW SIZE | WGT EACH (LBS) |
|-----------|-----------------------|------------|-----------------|----------------|
| 1/2       | 0.840                 | 5/16       | 1/4             | 0.04           |
| 3/4       | 1.050                 | 5/16       | 1/4             | 0.05           |
| 1         | 1.315                 | 5/16       | 1/4             | 0.09           |
| 1-1/4     | 1.660                 | 3/8        | 1/4             | 0.12           |
| 1-1/2     | 1.900                 | 7/16       | 3/8             | 0.16           |
| 2         | 2.375                 | 7/16       | 3/8             | 0.25           |
| 2-1/2     | 2.875                 | 11/16      | 5/8             | 0.49           |
| 3         | 3.500                 | 11/16      | 5/8             | 0.82           |
| 4         | 4.500                 | 3/4        | 5/8             | 1.30           |

| PROJECT INFORMATION                               | APPROVAL STAMP |
|---------------------------------------------------|----------------|
| Project:                                          | Notes:         |
| Address:                                          |                |
| Contractor:                                       |                |
| Engineer:                                         |                |
| Date:                                             |                |
| Approved      Approved as Noted      Not Approved |                |