


## Premium PE Film Tape

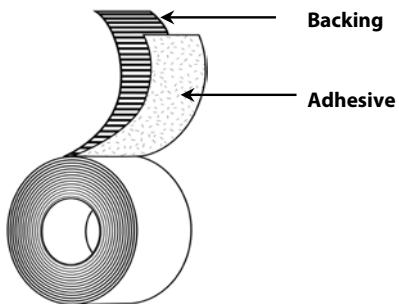

**Backing:** Polyethylene Film

**Adhesive:** Rubber

**Liner:** N/A

**Colors:** Clear, Black, Red, White

**Specifications:** Meets DPM 871-2, 871-3, and 877-1

**Standard Sizes:** 48mm x 55m, 72mm x 55m

### Applications

- Stucco and plaster masking
- General purpose outdoor masking
- Surface protection in aerospace, automotive, and manufacturing applications
- Bunding, wrapping, and repairs
- General purpose abatement applications such as hanging and patching PE sheeting, securing waste disposal bags, and more

### Features

- Polyethylene Film Backing
- Natural rubber based adhesive
- Low VOC Content

### Benefits

- Conformable and flexible
- Excellent durability and solvent resistance
- Withstands outdoor exposure and moisture
- High tack for a secure bond
- Repositionable and clean removal - no residue
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	8.0 mils	0.203 mm	ASTM D-1000
<b>Adhesion to Steel</b>	60 oz/in	6.56 N/cm	PSTC-101
<b>Tensile Strength</b>	21 lb/in	36.78 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>MVTR (96% RH, 100° F)</b>	0.112 perms		ASTM D-3833
<b>VOC Content</b>	<2 g/L		
<b>Elongation</b>	70%		

Recommended Storage Conditions: 32-90 °F at 50% RH ± 2%

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.