



G1662 Emergency Shower, Free Standing, Plastic Shower Head

G1662SSH Emergency Shower, Free Standing, Stainless Steel Shower Head

Application: Free standing emergency shower.

Shower Head: 10" diameter with 20 GPM flow control. Shower head is orange ABS plastic (G1662) or stainless steel (G1662SSH).

Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene covers on vertical piping for high visibility and corrosion resistance.

Supply: 1 1/4" NPT female top or side inlet.

Sign: ANSI-compliant identification sign.

Available Options

PCC All-polished chrome plated brass construction.

GRN Safety green ABS plastic shower head.

YEL Safety yellow ABS plastic shower head.

PCH Polished chrome plated cast brass shower head.


SC Self-closing ball valve. *Note: Emergency showers with self-closing valves do not comply with ANSI Z358.1-2014.*

HS Auxiliary hand-held drench hose for rinsing eyes, face or body. Unit has single FS-Plus™ spray type outlet head, self-closing valve with squeeze handle, 8 ft. reinforced PVC hose and mounting bracket.

TMV G3800LF thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.

AP275-200 Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.

AP250-015 Modesty curtain for horizontal shower installation.

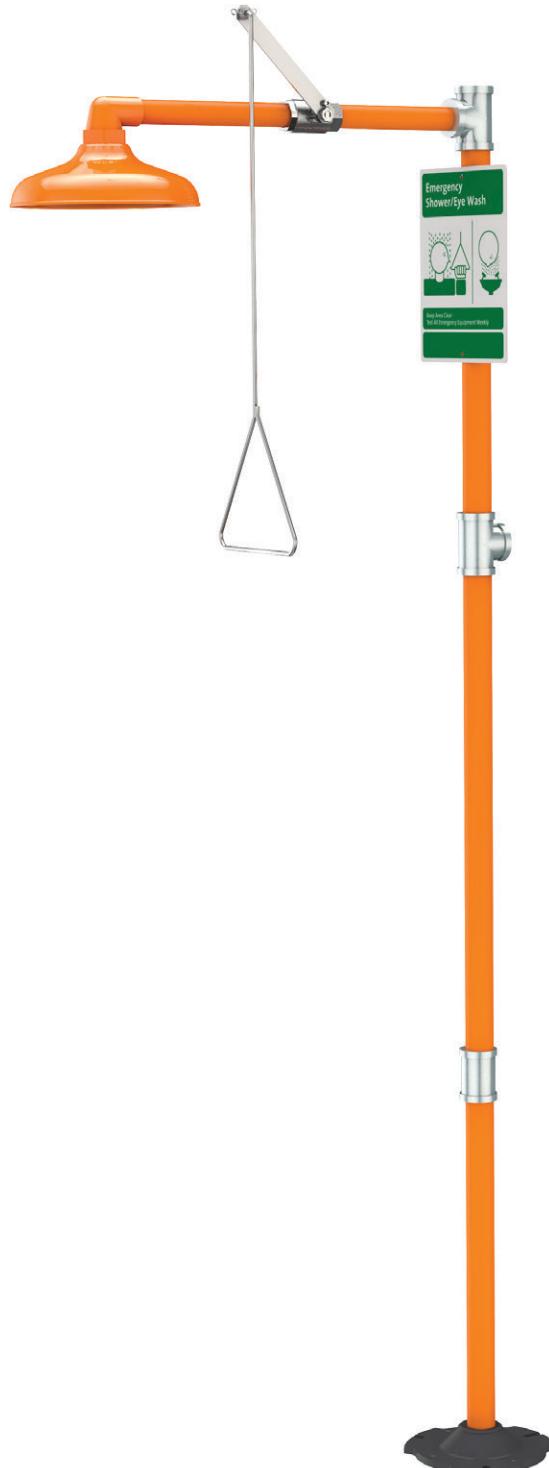




Guardian

Emergency Showers

G1662 Emergency Shower, Free Standing, Plastic Shower Head

G1662SSH Emergency Shower, Free Standing, Stainless Steel Shower Head

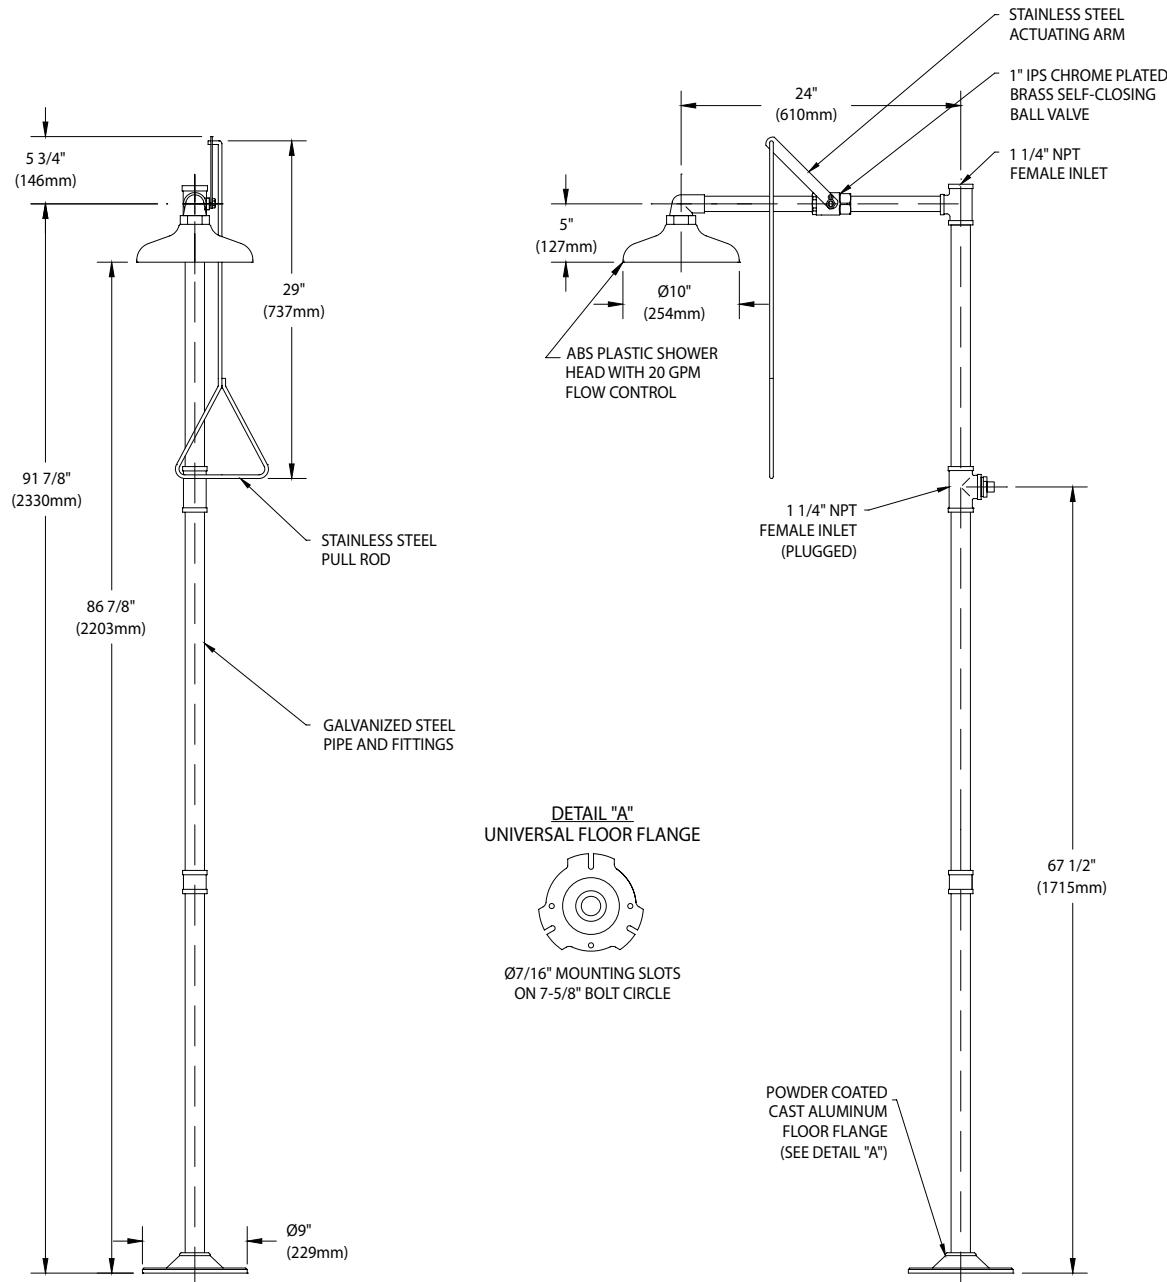

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4"$ (6mm).
rev. 0317

Guardian Equipment
1140 N North Branch St
Chicago, IL 60642

312 447 8100 TELEPHONE
312 447 8101 FACSIMILE
gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

