



**Haws®**

AXION® MSR Corrosion Resistant Pedestal Eye/Face Wash

model **7777**

## FEATURES & BENEFITS

### CONSTRUCTION

1-1/4" Type 304 Stainless Steel pipe and fittings along with cast finished stainless steel 9" (22.9 cm) diameter floor flange provide a superior defense in a highly corrosive environment.

### VALVES

Type 316 Stainless Steel ball valve is designed to make the flushing of fluid occur with the simple push of a stainless steel flag, and is equipped with a stainless steel ball and stem to provide a superior protection against corrosion and breakage.

### STRAINERS/FILTERS

Type 304 Stainless Steel in-line 50 x 50 mesh water strainer supplies added protection against corrosion and prevents debris from reaching the eye/face wash so the 8330 stays functioning at its best. Strainer is easily serviceable. Stainless steel dust cover protects eye/face wash head as well as bowl up until the last second before use further optimizing operation.

### SAFETY

8" x 10-3/4" (20.3 x 27.3 cm) universal emergency sign make the unit easily detected in an emergency. Test card to record weekly checks helps maintain the unit's best working quality.

### EYE/FACE WASH

AXION® MSR eye/face wash head (patent pending) uses an inverted directional laminar flow to sweep contaminants away from the vulnerable nasal cavity.

## OPTIONS

- Test Tag: SP170 is a green waterproof test card with space for date and initials of inspector. Used to record weekly testing of emergency equipment.
- Dust Cover: Model 9102 is a stainless steel cover that protects the eyewash heads as well as the bowl. (Picture shows cover mounted to an eyewash.)
- Foot Treadle : Model SP220SS foot control assembly, including chain, clamp, nut, ring, screw, spring and stainless steel treadle.
- Thermostatic Mixing Valve: Model 9201EFF AXION® Emergency Tempering Valve thermostatically mixes hot and cold water to provide a safe fluid supply for a single emergency eye/face wash, with a flow rate of 12 gpm (38.8 L).

For more information, visit [www.hawasco.com](http://www.hawasco.com) or call (888) 640-4297.



## SPECIFICATIONS

Model 7777 stainless steel pedestal-mounted eye/face wash shall include a stainless steel 11" (27.9 cm) round bowl, an AXION® MSR eye/face wash head with inverted directional laminar flow which achieves Zero Vertical Velocity™ supplied by an integral 3.7 gpm flow control, Type 316 stainless steel ball valve equipped with stainless steel ball and stem, and Type 304 stainless steel in-line 50 x 50 mesh water strainer. Unit shall also include Type 304 pipe and fittings, stainless steel floor flange, yellow plastic dust cover, universal sign, 1/2" NPT inlet, and 1-1/4" NPT waste.

## APPLICATIONS

In an environment where materials need to withstand the greatest corrosion, where eyes and face of any person may be exposed to these injurious or corrosive materials, suitable facilities for quick drenching or flushing of the eyes and face shall be provided within the work area for immediate emergency use. Emergency eye/face wash facilities shall be in unobstructed and accessible locations that require no more than 10 seconds for the injured person to reach. Model 7777 is certified by CSA to meet the ANSI Z358.1 Standard for Emergency Eyewash and Shower Equipment.




NOTES:

1. TO COMPLY WITH ANSI Z358.1-2009 FOR  
EMERGENCY EYEWASH OR EYE/FACE WASH AND  
SHOWER EQUIPMENT:
  - UNIT SHALL BE INSTALLED IN ACCORDANCE WITH  
MANUFACTURER'S INSTRUCTIONS AND ACCEPTABLE  
PLUMBING PRACTICES.
  - EYEWASH OR EYE/FACE WASH SHALL BE  
POSITIONED WITH NOZZLES NOT LESS THAN 83.8 CM (33  
IN.) AND NO GREATER THAN 114.3 CM (45 IN.) FROM  
SURFACE ON WHICH USER STANDS AND 15.3 CM (6 IN.)  
MINIMUM FROM WALL OR NEAREST OBSTRUCTION.


2. \*DIMENSIONS MAY VARY  $\pm 1/2"$  [12.7mm].

3. CENTERLINE WASTE PLACED 9" [229mm]  
MIN. FROM OBSTRUCTION.



4 DIM APPLIES WHEN OPTIONAL 9102 DUST COVER  
ASSEMBLY IS USED.

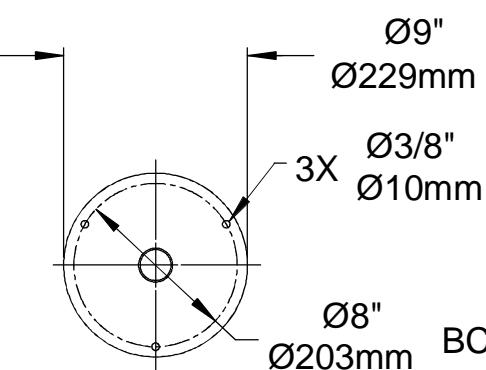

MOUNTING DETAIL



SIGN IS TO BE POSITIONED SUCH  
THAT IT IS VISIBLE WITHIN THE  
AREA SERVED BY THE EYEWASH

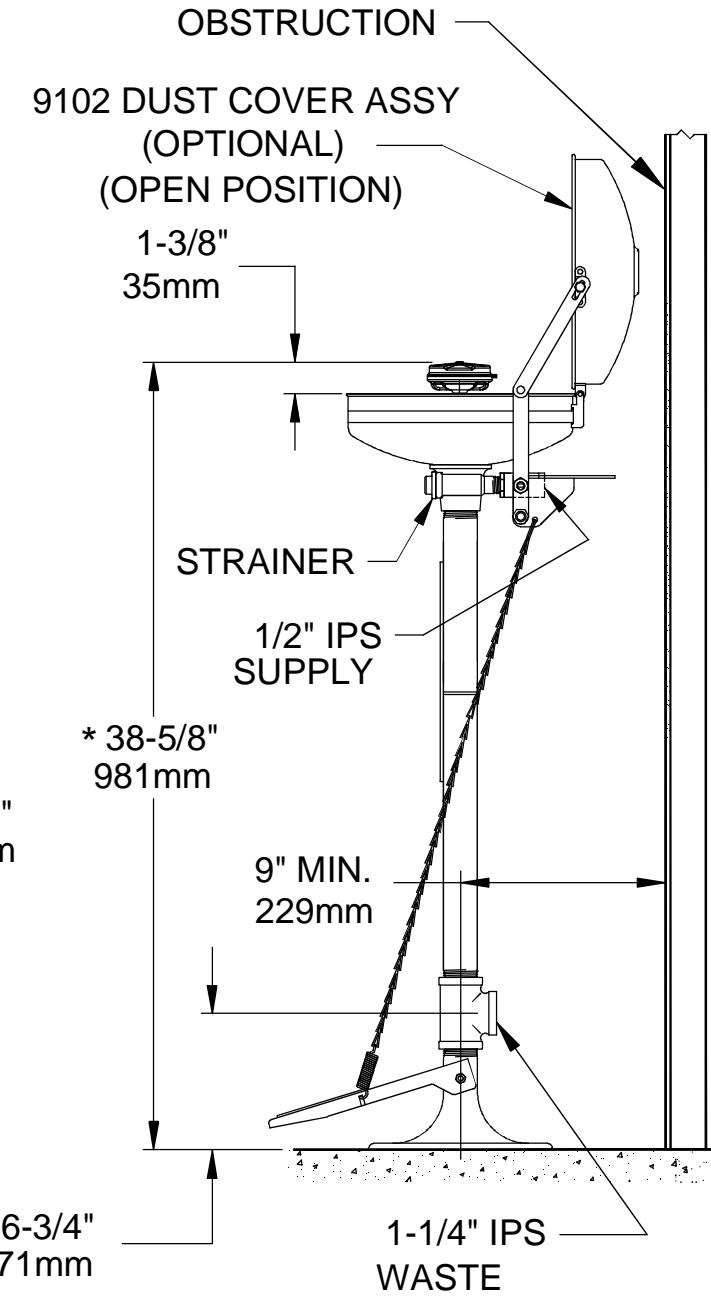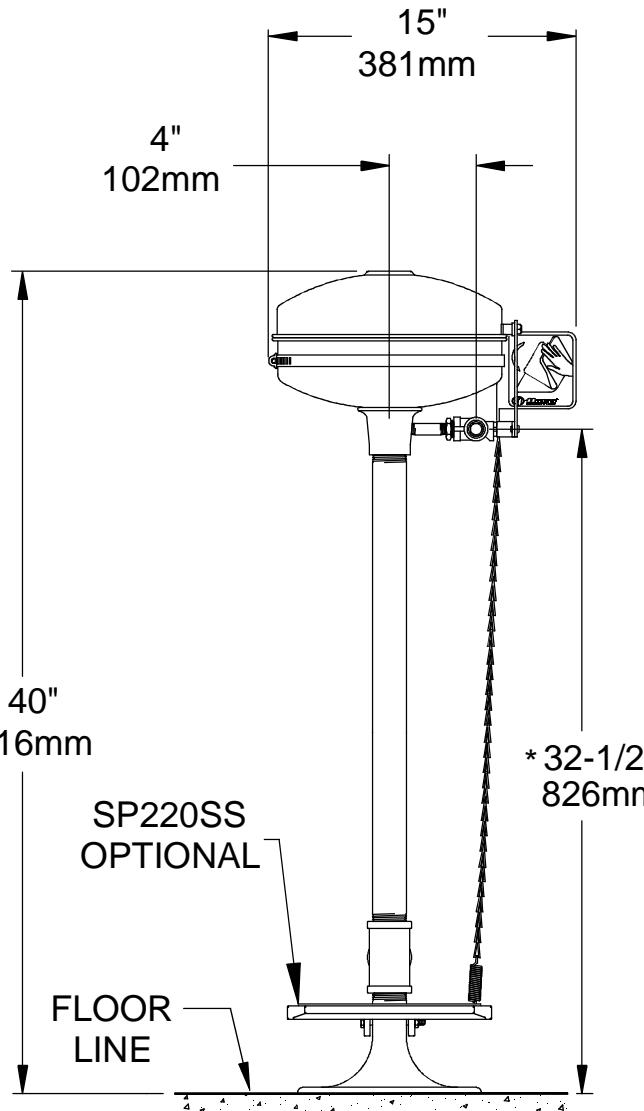

ECN NO.	REVISED PER	BY	MODEL(S)	PART NUMBER
ECN-5133		C.J.C.	7777	0002080102.D
DRAWN: C.J.L.	DATE: 05/91	CHKD: V.W.C.	SS PED MTD EYE/FACE WASH	REVISION
APPROVED: F.V.	DATE: 09/01/16		SCALE: 1/10	SIZE: A
			DRAWING TYPE: INSTALLATION	SHEET 1 OF 1