


**D6000-2 SERIES**★★★ **250**/bs.

LOAD CAPACITY

TYPE I  
DUTY RATING**STYLE: D-Rung Extension Ladder**

**Exclusive**  
Alflo® rung joint means  
Twist-Proof® performance

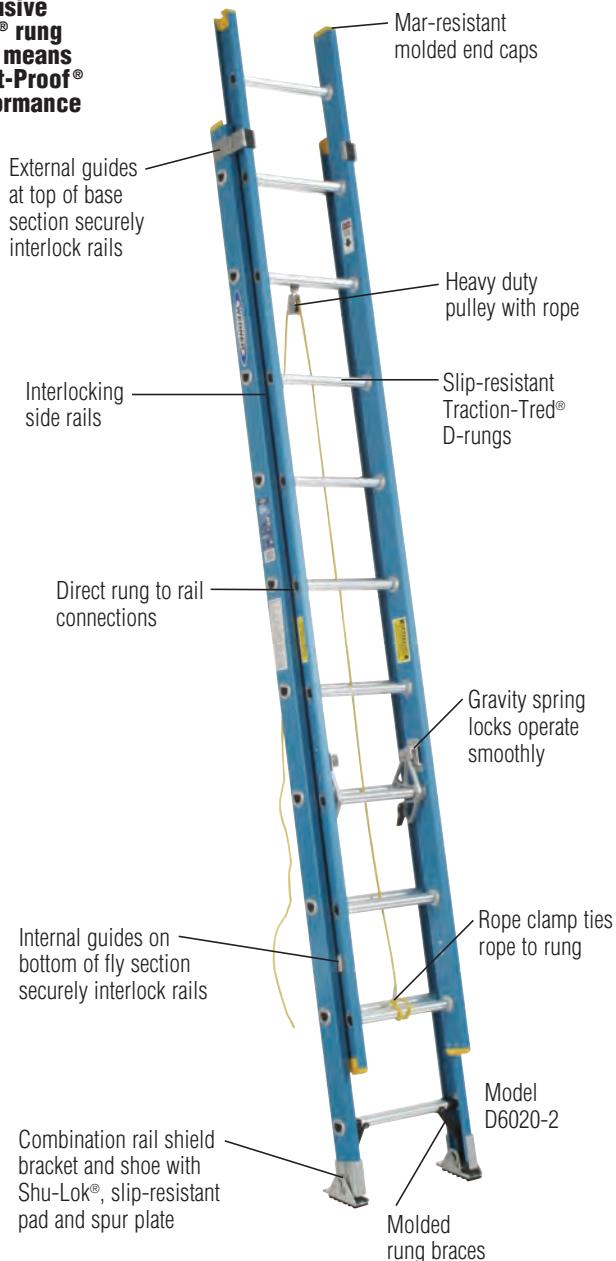

®The blue and yellow ladder is an exclusive registered trademark of Werner Co.

**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6016-2‡	16'	13'	7.0	32.5
D6020-2	20'	17'	8.7	39.0
D6024-2	24'	21'	10.3	46.0
D6028-2	28'	25'	12.0	55.5

‡ Note: D6016-2 is not equipped with rope and pulley

**DIMENSIONS**


Rails:	3-3/8" wide	Fly Width:	15-3/4" outside rails
Flange:	1-3/16" wide	Base Width:	18-1/8" outside shoes
Rungs:	1-1/2"		

**D5900-2 SERIES**★★★ **225**/bs.

LOAD CAPACITY

TYPE II  
DUTY RATING**STYLE: D-Rung Extension Ladder**

**Exclusive**  
Alflo® rung joint means  
Twist-Proof® performance

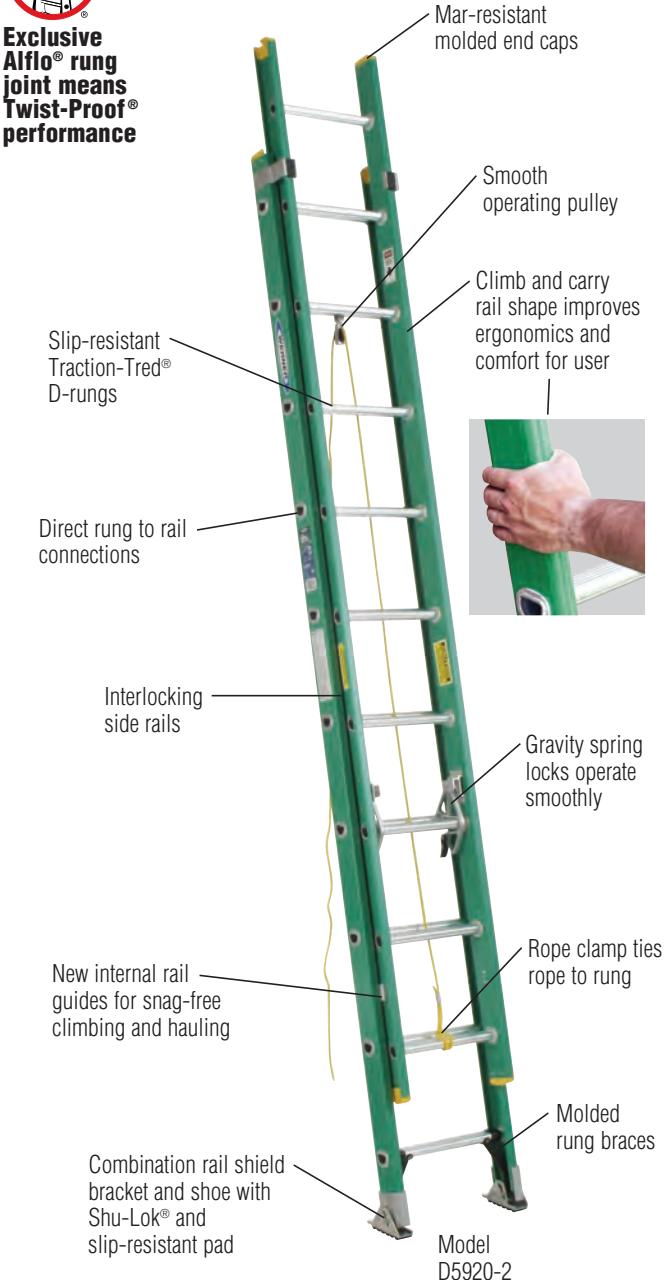**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D5916-2‡	16'	13'	5.9	27.0
D5920-2	20'	17'	7.4	33.0
D5924-2	24'	21'	8.9	39.0

‡ Note: D5916-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3-5/16" wide	Fly Width:	15-1/8" outside rails
Flange:	1-3/16" wide	Base Width:	17-3/4" outside shoes
Rungs:	1-1/2"		



# FIBERGLASS EXTENSION LADDER COMPARISON CHART

Features and Benefits	D7100-2LV SERIES TYPE IAA/IA	D7100-2 SERIES TYPE IAA/IA	7100 SERIES TYPE IAA	D8200-2EQ SERIES TYPE IA	D6200 SERIES TYPE IA	D6000-2 SERIES TYPE I	D5900-2 SERIES TYPE II
Guides at top of base section	★	★	★	★	★	★	
Guides on bottom of fly section	★	★	★	★	★	★	★
Pulley and rope systems	★	★	★	★	★	★	★
Rail shield and shoe bracket protects rail	★	★	★	★	★	★	
Shoe with slip-resistant pad and spur plate	★	★	★	★	★	★	★
Rugged gravity spring locks	★	★	★	★	★	★	★
Rope clamp ties rope to rung	★	★	★	★	★	★	★
Alflo® rung joint for Twist-Proof® performance	★	★	★	★	★	★	★
Electrically non-conductive side rails	★	★	★	★	★	★	★
Mar-resistant molded end caps	★	★	★	★	★	★	★
Base section may be used as a single ladder	★	★	★	★	★	★	★
Pre-pierced holes for easy field installation of accessories	★	★	★	★	★		
Plate and rung assembly to allow for rung replacement	★	★	★				
Direct rung to rail connections				★	★	★	★
Interlocking side rails	★	★	★	★	★	★	★
Slip-resistant D-rungs	★	★		★	★	★	★
Slip-resistant round rungs			★				
Molded rung braces					★	★	★
Integrated leveling	★			★			




## 7800 SERIES

★★★★★ **375**/bs.

LOAD CAPACITY

TYPE IAA  
DUTY RATING

**STYLE:** Combination Step/Extension Ladder<sup>††</sup>

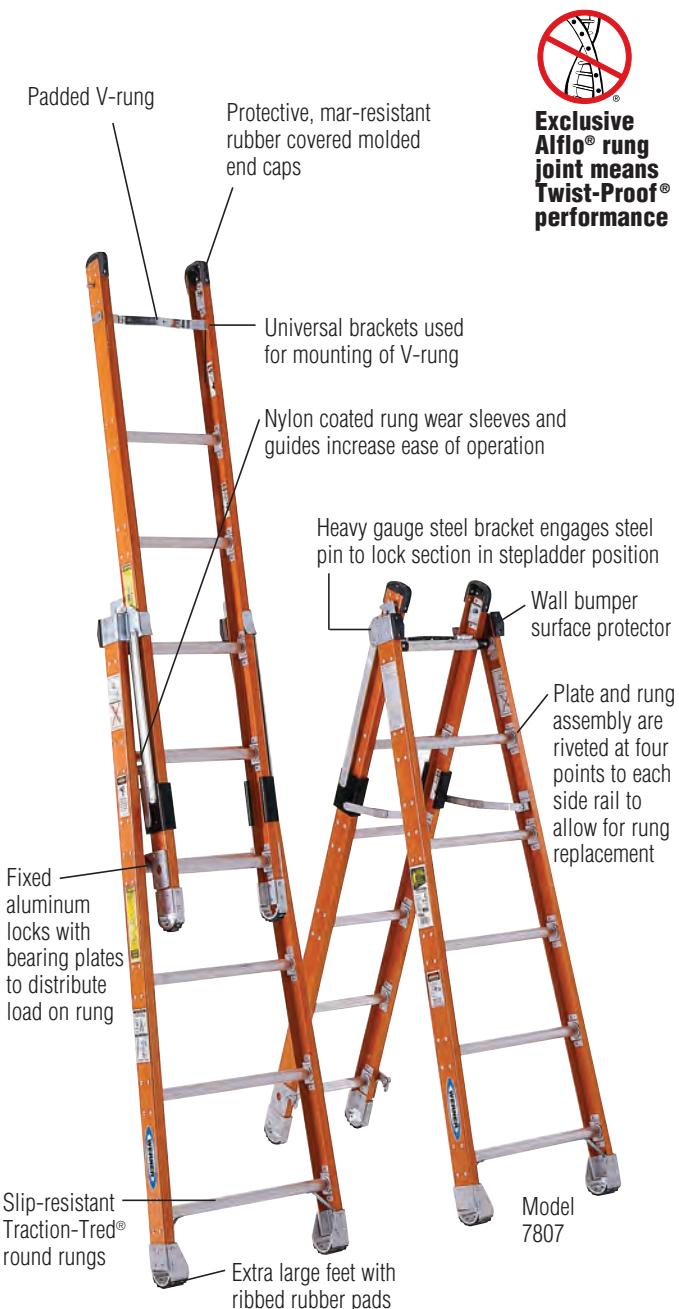

### SPECIFICATIONS

Model No.	Stepladder Size	Width at Flared Base (outside rails)	Stepladder Spread to Outside of Shoes	Length of Ladder in Closed Position	Extended Ladder Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7806	6'	23-1/4"	46-1/2"	72-3/4"	9-1/2"	8.6	33.5
7807	7'	24-1/4"	53-1/2"	84-3/4"	11-1/2"	10.3	37.0
7808	8'	25-1/4"	60-1/2"	96-3/4"	13-1/2"	12.1	40.5

<sup>††</sup>Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

	Parallel Section	Flared Section
Overlap	3'	--
Rails:	3-1/8" wide	3-1/8" wide
Flange:	1-3/16" wide	1-3/16" wide
Ladder Width:	14-1/2" outside rails	14-1/2" outside rails at top
Ladder in Closed Position:	--	7-7/8" deep

## M7100-1 SERIES

★★★★★ **375**/bs.

LOAD CAPACITY

TYPE IAA  
DUTY RATING

**STYLE:** Manhole Ladder



### SPECIFICATIONS

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
M7108-1	8'	3.0	20.0
M7110-1	10'	3.7	24.0
M7112-1	12'	4.4	28.0
M7114-1	14'	5.2	32.0
M7116-1	16'	5.9	39.5

### DIMENSIONS

Rails:	3-5/16" wide	Rungs:	1-1/4"
Flange:	1-3/16" wide	Ladder Width:	12-3/8" outside shoes

**S7900 SERIES**

★★★★★ **375** lbs. LOAD CAPACITY **3 SECTIONS**


★★★★★ **300** lbs. LOAD CAPACITY **4 SECTIONS** TYPE IA DUTY RATING

**STYLE: Interchangeable Tapered Sectional Ladder**



**Exclusive**  
Alflo® rung  
joint means  
Twist-Proof®  
performance

- Maximum number of sections to be used – 4

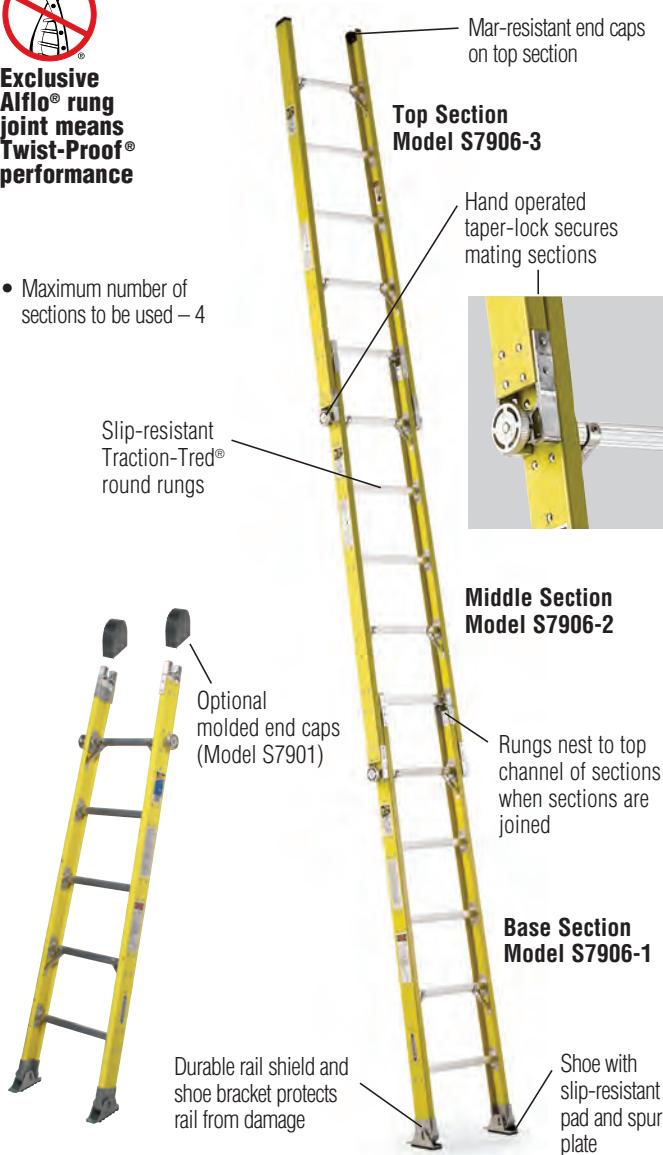**SPECIFICATIONS**

Model No.	Description	Top of Section	Bottom of Section	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
S7906-1	6' tapered base with swivel shoes	15-3/4"	19-3/4"	2.3	17.0
S7906-2	6' intermediate	15-3/4"	18-3/4"	3.5	15.5
S7906-3	6' top with molded end caps	16-3/16"	18-3/4"	3.4	13.0
S7901 (Accessory)	End caps for middle or base sections	N/A	N/A	0.1	1.0 ea.

**ASSEMBLY DESCRIPTION**

Quantity of Sections	Model No.	Total Assembled Size
1	S7906-1 base	6' 2"
1	S7906-1 base	15' 11"
1	S7906-2 middle	
1	S7906-3 top	20' 11"
1	S7906-1 base	
2	S7906-2 middle	
1	S7906-3 top	

**DIMENSIONS**


Rails:	3-5/16" wide
Flange:	1-3/16" wide
Rungs:	1-1/4" diameter

**9500-2/9500-1 SERIES**

★★★★★ **300** lbs. LOAD CAPACITY

TYPE IA DUTY RATING

**STYLE: All-Fiberglass Extension/Straight Ladder**

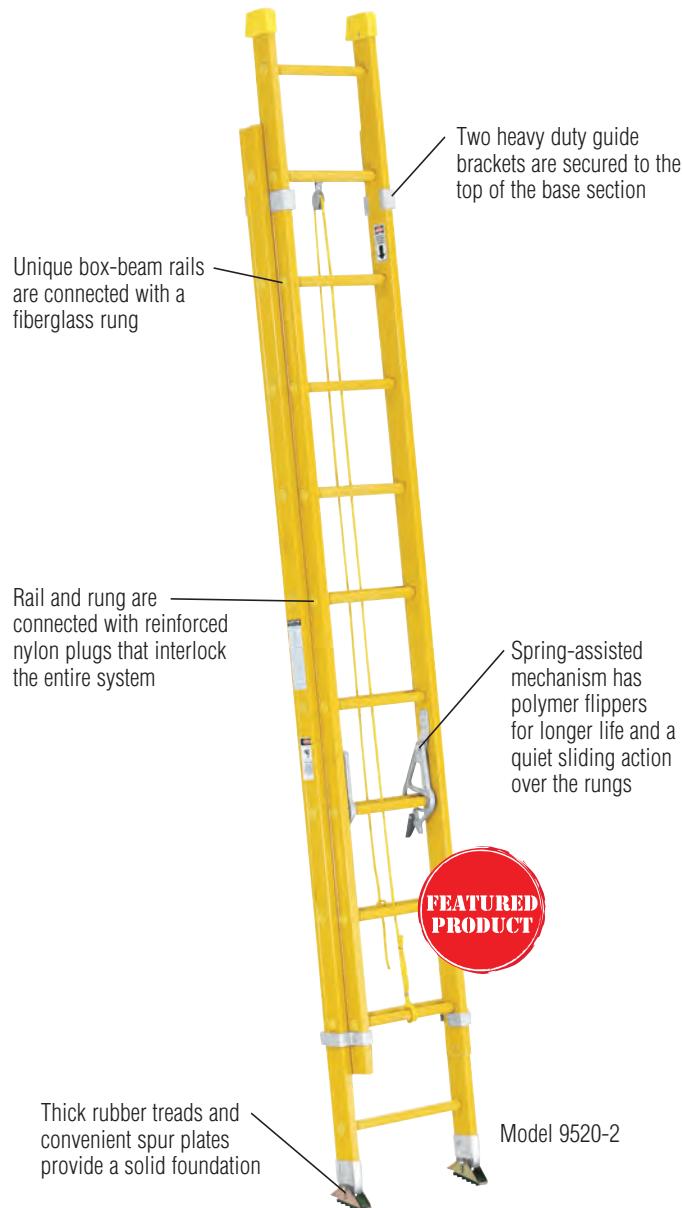**SPECIFICATIONS**

Model	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
9516-2	16'	13'	8.3	41.0	9508-1	8'	5.5	18.0
9520-2	20'	17'	10.2	49.0	9510-1	10'	6.8	22.0
9524-2	24'	21'	12.2	56.0	9512-1	12'	8.0	26.0
9528-2	28'	25'	14.1	64.0	9514-1	14'	9.4	30.0
9532-2	32'	29'	16.0	72.0	9516-1	16'	10.7	34.0
					9518-1	18'	11.2	38.0
					9520-1	20'	12.5	42.0

**DIMENSIONS**

Rails:	3-1/4" wide	Fly Width:	15-1/2" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-1/4"		




## SPF00-1/TPF00-1 SERIES

★★★ **300** lbs.

LOAD CAPACITY

**TYPE IA**  
DUTY RATING

### STYLE: Posting Ladder

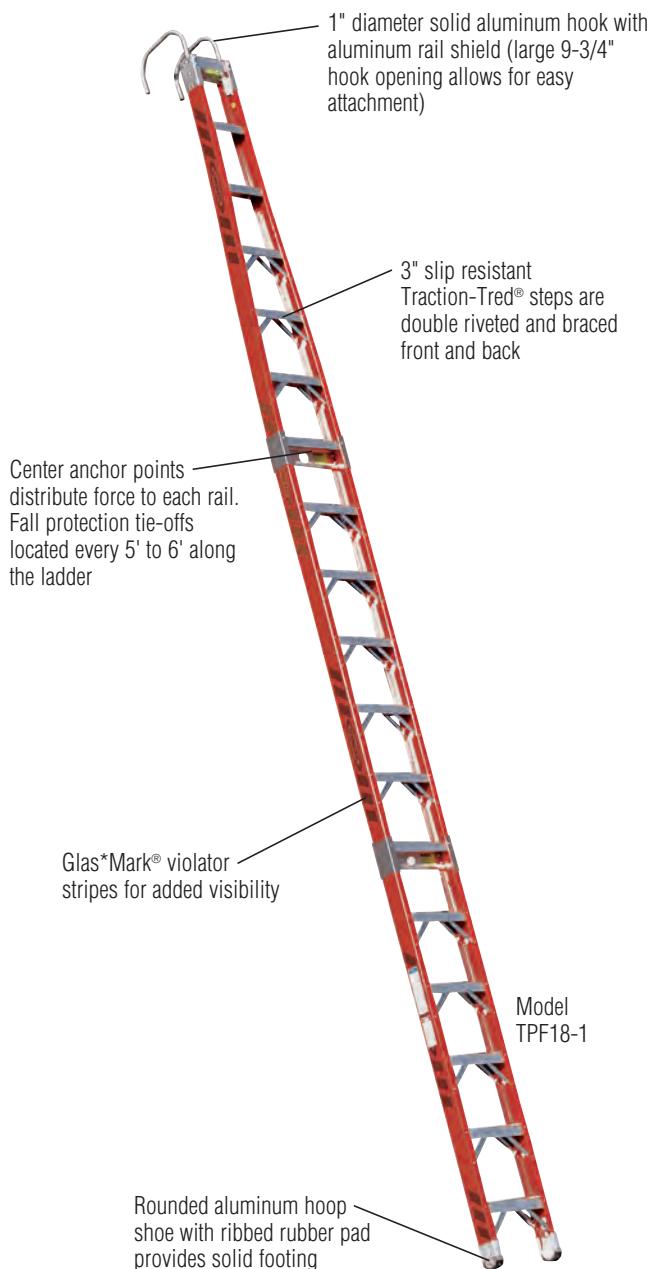

### SPECIFICATIONS

Model No.	Total Length	Length for Shipping	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
<b>Straight Posting Ladders (not shown above)</b>				
SPF14-1	14'	15'	6.0	38.0
SPF16-1	16'	17'	6.8	43.0
SPF18-1	18'	19'	7.6	49.0
SPF20-1	20'	21'	8.4	58.0
<b>Tapered Posting Ladders</b>				
TPF14-1	14'	15'	6.0	37.0
TPF16-1	16'	17'	6.8	42.0
TPF18-1	18'	19'	7.6	48.0
TPF20-1	20'	21'	8.4	57.0

### DIMENSIONS

Rails: 3-5/16" wide	Steps: 2-7/8" wide
Flange: 1-3/16" wide	Base Width: 14-5/8"

## S7700 SERIES

★★★ **250** lbs.

LOAD CAPACITY

**TYPE I**  
DUTY RATING

### STYLE: Interchangeable Parallel Sectional Ladder



**Exclusive**  
**Aliflo®** rung  
joint means  
**Twist-Proof®**  
performance



### SPECIFICATIONS

Model No.	Description	Top of Section	Bottom of Section	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
S7706-1	For manhole use - 6' length	12" wide	12" wide	2.1	15.5
<b>End Caps and Shoes</b>					
S7701	End cap (2 required)	N/A	N/A	0.1	1.5 ea.
S7702-1	Shoe with black EPDM pad (2 required)	N/A	N/A	0.1	1.5 ea.
S7702-2	Shoe with gray EPDM pad (2 required) Buna N Pad - Oil resistant	N/A	N/A	0.1	1.5 ea.

### ASSEMBLY DESCRIPTION

Max. No. of Sections	Approx. Max. Assembled Length
(3) assembled 6' sections with (1) pair of end caps and (1) pair of shoes	19'

### DIMENSIONS

Rails: 3-5/16" wide
Flange: 1-3/16" wide
Rungs: 1-1/4" diameter

## 400 SERIES

★★★★★ **375**/bs.

LOAD CAPACITY

TYPE IAA  
DUTY RATING

STYLE: Stepladder



- Optional black molded pail shelf kit, model no. PK76-3



## SPECIFICATIONS

NOTE: Type IAA duty rating is for stepladders up to 12 ft.

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
404	4'	21-1/4"	30-1/8"	4.8	16.0
406	6'	24-3/4"	42-7/16"	8.1	24.0
408	8'	28-1/4"	54-3/4"	12.2	33.5
410	10'	31-3/4"	67"	17.0	43.5
412	12'	35-1/4"	79-3/8"	22.5	54.5

★★★★★ **300**/bs.

LOAD CAPACITY

TYPE IA  
DUTY RATING

414	14'	38-5/8"	91-11/16"	28.2	65.0
416	16'	42-1/8"	104"	34.7	77.5

## DIMENSIONS

Top: 7" x 14"	Steps: 3" wide
Front Rails: 3-1/8" wide	Rear Rails: 1-3/4" wide
Front Flange: 1-1/8" wide	Rear Flange: 1" wide

## T400 SERIES

★★★★★ **375**/bs.

LOAD CAPACITY

PER SIDE

TYPE IAA  
DUTY RATING

STYLE: Multi-Use Twin Stepladder††



## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T404	4'	21-1/4"	36-1/4"	5.0	21.5
T406	6'	24-3/4"	50-1/4"	8.8	31.0
T408	8'	28-1/4"	64-1/4"	13.3	42.0
T410	10'	31-3/4"	78-1/4"	18.7	55.0
T412	12'	35-1/4"	92-1/4"	25.0	69.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

Top: 8-1/4" x 14"	Steps: 3" wide
Rails: 3-1/8" wide	Flange: 1-1/8" wide

**P400 SERIES****★★★★★ 375 lbs.**

LOAD CAPACITY

**TYPE IAA  
DUTY RATING****STYLE: Platform Ladder**

- Internal spreaders on 8' and above

**SPECIFICATIONS** NOTE: Type IAA duty rating is for platforms ranging in size from 4' to 8'

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P404	4'	6'	24-3/4"	42-1/16"	7.1	25.0
P406	6'	8'	28-1/4"	54-3/4"	10.1	33.5
P408	8'	10'	31-3/4"	79-1/2"	20.3	45.5

**★★★★★ 300 lbs.** LOAD CAPACITY **TYPE IA  
DUTY RATING**

P410	10'	12'	35-1/4"	79-3/8"	20.3	54.5
P412	12'	14'	38-3/4"	91-11/16"	25.2	66.0
P414	14'	16'	42-1/4"	104"	31.1	79.5

**DIMENSIONS**

Platform: 12-5/8" x 15"	Steps: 3" wide
Front Rails: 3-1/8" wide	Rear Rails: 1-3/4" wide
Front Flange: 1-1/8" wide	Rear Flange: 1" wide

**370 SERIES****★★★★★ 300 lbs.**

LOAD CAPACITY

**TYPE IA  
DUTY RATING****STYLE: Stepladder**

- External Pinch-Proof™ spreaders on 3', 7', 8' and 10' models

**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
373	3'	17-3/4"	23-3/8"	1.5	9.0
374	4'	19-1/2"	29-1/2"	2.1	11.0
375	5'	21-1/4"	35-3/4"	2.8	13.5
376	6'	23"	41-7/8"	3.5	15.5
378	8'	26-1/2"	54-1/4"	5.1	22.5
310	10'	30"	66-1/2"	7.0	31.0

**DIMENSIONS**

Top: 5-1/8" x 12-1/8"	Steps: 3" wide
Front Rails: 3" wide	Rear Rails: 1-1/4" wide
Front Flange: 7/8" wide	Rear Flange: 1" wide

**T370 SERIES****★★★★ 300 lbs.** LOAD CAPACITY  
**PER SIDE****TYPE IA**  
DUTY RATING**STYLE: Multi-Use Twin Stepladder**<sup>††</sup>

- External Pinch-Proof™ spreaders on 4' model

**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T374	4'	21-1/4"	36"	3.5	14.5
T376	6'	24-3/4"	50"	5.7	21.5
T378	8'	28-1/4"	64"	8.2	31.0
T310	10'	31-3/4"	78"	11.1	43.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Top:	8-1/4" x 14"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide

**P370 SERIES****★★★★ 300 lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING**STYLE: Platform Ladder**

- External Pinch-Proof™ spreaders on 8' model

**SPECIFICATIONS**

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P372	2'	4'	21-1/4"	30"	3.0	12.0
P373	3'	5'	23"	36-1/4"	3.9	14.5
P374	4'	6'	24-3/4"	42-3/4"	4.9	17.0
P376	6'	8'	28-1/4"	54-3/4"	7.1	23.0
P378	8'	10'	31-3/4"	67"	8.4	32.0

**DIMENSIONS**

Platform:	12-5/8" x 18"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/4" wide
Front Flange:	7/8" wide	Rear Flange:	1" wide

**PT370 SERIES****★★★★ 300 lbs.**LOAD CAPACITY  
**PER SIDE**TYPE IA  
DUTY RATING**STYLE: Stockr's Ladder** <sup>††</sup>

- Available with 4 casters to allow for easy 360° mobility
- Easy to handle and folds to a 10" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models

**SPECIFICATIONS**

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PT372	2'	4'	21-1/4"	36"	5.1	21.0	PT372-4C	27.5
PT374	4'	6'	24-3/4"	50-1/2"	8.9	27.0	PT374-4C	33.5
PT376	6'	8'	28-1/4"	65-1/4"	13.5	36.0	PT376-4C	42.5
PT378	8'	10'	31-3/4"	81-1/2"	19.0	46.5	PT378-4C	54.0
PT310	10'	12'	34-1/4"	96"	24.5	58.5	PT310-4C	66.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Platform: 12-3/4" x 22"	Steps: 3" wide
Rails: 3" wide	Flange: 3/4" wide

**SH378 MODEL****★★★★ 300 lbs.**

LOAD CAPACITY

TYPE IA  
DUTY RATING**STYLE: Shelf Ladder****SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SH378	8'	28-1/4"	3.9	15.5

**DIMENSIONS**

Top: 7" x 14"	Steps: 3" wide
Rails: 3" wide	Flange: 7/8" wide

**SSA00 SERIES****★★★★★ 375 lbs.**

LOAD CAPACITY

TYPE IAA  
DUTY RATING**STYLE: Step Stand****SPECIFICATIONS**

Model No.	Size	Max. Standing Height	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SSA02	2'	20"	17"	21"	2.6	16.0
SSA03	3'	30"	18-3/4"	27-1/2"	4.0	21.0

**DIMENSIONS**

Top: 9" x 14"	Steps: 6" wide
Front Rails: 6" wide	Rear Rails: 1-7/8" wide
Front Flange: 1-1/8" wide	Rear Flange: 1-3/16" wide

**TW370-30 SERIES****★★★★★ 300 lbs.**LOAD CAPACITY  
**PER SIDE**TYPE IIA  
DUTY RATING**STYLE: Portable Work Stand††**

- Extra wide for versatile use as work stand, stage or material support
- Lightweight and portable

**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
TW372-30	2'	33"	22"	4.0	12.5
TW373-30	3'	34-3/4"	29"	5.6	17.5
TW374-30	4'	36-1/2"	36"	7.8	24.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Top: 8" x 30"	Steps: 3" wide
Rails: 3" wide	Flange: 7/8" wide

**150B MODEL****★★★★★ 300 lbs.**

LOAD CAPACITY

TYPE IIA  
DUTY RATING**STYLE: Step Stool****SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
150B	2'	17"	19"	1.9	5.5

**DIMENSIONS**

Top: 6" x 12-3/8"	Steps: 3" wide
Front Rails: 3" wide	Rear Rails: 1-1/8" wide
Front Flange: 3/4" wide	Rear Flange: 1" wide

**T372 MODEL****★★★★★ 300 lbs.**LOAD CAPACITY  
**PER SIDE**TYPE IIA  
DUTY RATING**STYLE: Twin Step Stool††**

- Folds to 7-1/4" width for easy storage

Note: Planks or platforms shall be secured to the step stools. The ends of each plank or platform shall extend beyond the outside edge of each step stool by a minimum of 4 inches and a maximum of 10 inches.

**SPECIFICATIONS**

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T372	2'	21-1/4"	23-3/8"	2.3	9.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Rails: 3" wide	Flange: 7/8" wide
Steps: 3" wide	

## 360 SERIES

★★★ **250**/bs.

LOAD CAPACITY

**TYPE I**  
DUTY RATING

### STYLE: Stepladder



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
363	3'	17"	23-1/4"	1.7	8.0
364	4'	18-1/2"	29-1/4"	2.4	10.5
365	5'	20"	35-1/2"	3.1	12.5
366	6'	21-1/2"	41-5/8"	3.9	14.5
368	8'	24-1/2"	54"	5.7	21.5

### DIMENSIONS

Top: 5" x 12-3/8"	Steps: 3" wide
Front Rails: 3" wide	Rear Rails: 1-1/8" wide
Front Flange: 3/4" wide	Rear Flange: 1" wide

## 350 SERIES

★★★ **225**lbs.

LOAD CAPACITY

**TYPE II**  
DUTY RATING

### STYLE: Stepladder



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
354	4'	18-1/2"	29-1/4"	2.4	10.0
355	5'	20"	35-1/2"	3.1	12.0
356	6'	21-1/2"	41-5/8"	3.9	13.5

### DIMENSIONS

Top: 4-5/8" x 12-1/2"	Steps: 3" wide
Front Rails: 3" wide	Rear Rails: 1-1/8" wide
Front Flange: 3/4" wide	Rear Flange: 1" wide



**244 MODEL****★ 200/lbs.** LOAD CAPACITY**TYPE III**  
DUTY RATING**STYLE: Utility Ladder**

- Lightweight – easy action open-close
- Compact for convenient storage – folds to 3"

**SPECIFICATIONS**

Model No.	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
244	3-1/2"	18-1/2"	22-1/2"	1.4	9.0

**DIMENSIONS**

Front Tubular Rails: 1-1/8" diameter	Steps: 6" wide
Rear Tubular Rails: 1" diameter	Height to 2nd Step: 23"

**260 SERIES****★ 200/lbs.** LOAD CAPACITY**TYPE III**  
DUTY RATING**STYLE: Platform Ladder**

- Compact for convenient storage – folds to 3-1/2"

**SPECIFICATIONS**

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
264	22-1/2"	4-1/2'	20"	25-1/2"	2.0	11.5
265	33-1/2"	5-1/2'	21-1/2"	33-1/4"	2.6	15.0

**DIMENSIONS**

Platform: 14-1/2" x 12"	Steps: 3" wide
Front Tubular Rails: 1-1/8" diameter	Rear Tubular Rails: 1" diameter

# ALUMINUM STEPLADDER COMPARISON CHART



Features and Benefits	400 SERIES TYPE IAA/IA	T400 SERIES TYPE IAA	P400 SERIES TYPE IAA/IA	370 SERIES TYPE IA	T370 SERIES TYPE IA	P370 SERIES TYPE IA	PT370 SERIES TYPE IA	360 SERIES TYPE I	350 SERIES TYPE II
Slip-resistant foot pad	★	★	★	★	★	★	★	★	★
Slip-resistant Traction-Tred® steps	★	★	★	★	★	★	★	★	★
Dual drill HolsterTop®	★								
External spreaders	4', 5', 8' models	4', 6' models		3', 8', 10' models				★	★
Designed for one or two person jobs		★			★		★		
Knee-braced top & bottom steps	★	★	★	★	★	★	★	★	★
Aluminum top	★	★	★		★	★			
Full set of rear horizontals	★		★	★		★			
Spill-Proof® pail shelf with rag rack				★				★	★
Tool-Tra-Top®	★			★				★	★
Safety guard rail			★			★	★		
Platform for comfortable work area			★			★	★		
Paint can hanger on top				★				★	★
H-spreader for one-handed carry & close				★					

## 500-1 SERIES

★★★★★ **375**/bs.

LOAD CAPACITY

TYPE IAA  
DUTY RATING

STYLE: Round Rung Straight Ladder

Exclusive  
Alfio® rung  
joint means  
Twist-Proof®  
performanceExtra heavy duty  
I-beam railsTraction-Tred® deeply  
serrated aluminum  
round rungsModel  
508-1

## SPECIFICATIONS

NOTE: Type IAA duty rating is for single ladders up to 16 ft.

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
508-1	8'	2.9	16.5
510-1	10'	3.6	20.0
512-1	12'	4.3	24.0
514-1	14'	5.0	27.5
516-1	16'	5.7	37.0

★★★★★ **300**/bs.

LOAD CAPACITY

TYPE IA  
DUTY RATING

518-1	18'	6.4	41.0
520-1	20'	7.1	45.5
524-1	24'	14.0	60.5

## DIMENSIONS

	Rails:	Flange:	Round Rungs:	Base Width:
8' to 14'	3" wide	1-3/16"	1-1/4"	16-7/8"
16' to 20'	3" wide	1-1/4"	1-1/4"	16-7/8"
24'	4" wide	1-3/8"	1-1/4"	20-5/8"

## D500-2 SERIES

★★★★★ **375**/bs.

LOAD CAPACITY

TYPE IAA  
DUTY RATING

STYLE: Flat Rung Extension Ladder

Exclusive  
Alfio® rung  
joint means  
Twist-Proof®  
performanceMar-resistant end  
caps notched for  
easy separation of  
sectionsExtra heavy duty  
I-beam railsInterlocking  
side rails4-piece pulley with 3/8"  
rope. 36' to 48' models  
have heavy duty rope and  
double pulley systemSlip-resistant  
Traction-Tred®  
D-rungsBase and fly  
separate easily  
for use as an  
extension or two  
single sectionsRugged spring  
loaded locks  
operate smoothlyInternal guides  
increase ease  
of operationMolded  
slip-resistant  
shoes for use  
as a single  
sectionHeavy duty, self-aligning,  
free-swinging shoe with  
slip-resistant tread and  
replaceable steel  
spur plateModel  
D520-2

## SPECIFICATIONS

NOTE: Type IAA duty rating is for extension ladders up to 32 ft.

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D520-2	20'	17'	8.8	42.0
D524-2	24'	21'	10.4	49.0
D528-2	28'	25'	12.1	65.5
D532-2	32'	29'	13.8	74.0

★★★★★ **300**/bs.

LOAD CAPACITY

TYPE IA  
DUTY RATING

D536-2	36'	32'	15.4	90.0
D540-2	40'	35'	17.0	99.5
D544-2	44'	39'	21.4	131.0
D548-2	48'	43'	23.3	142.5

## DIMENSIONS

Rails:	3-1/4" wide	Rungs:	1-3/4"
Flange:	1-3/16" wide (20' & 24') 1-1/4" wide (28' to 48')	Base Section Width:	19-1/8" outside shoes 20-1/8" (44' & 48')

**D1500-2/D1500-1 SERIES****★★★ 300 lbs.**

LOAD CAPACITY

**TYPE IA**  
DUTY RATING**STYLE: D-Rung Extension/Straight Ladder****Exclusive  
Aliflo® rung  
joint means  
Twist-Proof®  
performance**Thick guide  
bracket engages  
full fly railSmooth operating  
pulley design – enclosed  
shape protects pulleySlip-resistant –  
Traction-Tred® D-rungsGuide brackets for  
durability and smooth  
operation of fly sectionRugged shoe rests flat or  
is held in spur position  
with Shu-Lok® feature**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1516-2‡	16'	13'	6.2	30.5	D1508-1	8'	3.6	14.5
D1520-2	20'	17'	7.7	37.0	D1510-1	10'	4.5	17.5
D1524-2	24'	21'	9.2	45.0	D1512-1	12'	5.4	21.5
D1528-2	28'	25'	10.7	56.0	D1514-1	14'	6.2	27.0
D1532-2	32'	29'	12.2	67.0	D1516-1	16'	7.1	32.5
D1536-2	36'	32'	13.7	80.0	D1518-1	18'	8.0	38.5
D1540-2	40'	35'	15.2	89.5	D1520-1	20'	8.9	43.5

‡ Note: D1516-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails: 3" wide	Rungs: 1-3/4"
Flange: 1-1/8" wide	Base Width: 18-1/8" outside rails

**560-3 MODEL****★★★ 250 lbs.**

LOAD CAPACITY

**TYPE I**  
DUTY RATING**STYLE: Round Rung Extension Ladder****Exclusive  
Aliflo® rung  
joint means  
Twist-Proof®  
performance**Removable top fly  
section can be used  
as a single ladderHeavy duty rope and double  
pulley system lift fly and  
intermediate sectionsBottom base section  
with top fly section  
can be used as a 40'  
extension ladderRugged spring  
loaded locks operate  
smoothlyMolded slip-resistant  
shoes for use as a  
single section**SPECIFICATIONS**


Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
560-3	60'	47'	26.8	179.0

**DIMENSIONS**

Rails: 4" wide	Rungs: 1-1/4"
Flange: 2" wide (base & intermediate sections) 1-3/8" wide (top fly section)	Base Width: 23-1/2"

**D1800-2EQ SERIES****★★★ 250/lbs.**

LOAD CAPACITY

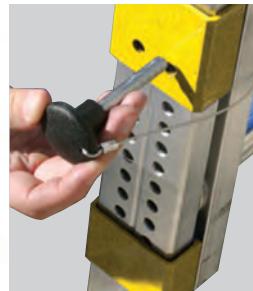TYPE I  
DUTY RATING**STYLE: Extension Ladder with Integrated Leveling****Exclusive  
Alfio® rung  
joint means  
Twist-Proof®  
performance**Lightweight  
aluminumSlip-resistant  
Traction-Tred®  
D-rungsHeavy duty  
spring-loaded  
locks operate  
smoothlyModel  
D1820-2EQ**THE Equalizer®**  
ELIMINATES UNEVEN GROUNDFactory installed adjustable  
EverLevel® leveling system  
exceeds OSHA and ANSI  
requirementsEasily adjustable in  
3/8" increments up to 8-1/4"Convenient built-in bubble  
levelDual action foot for use on  
hard or penetrable surfacesFEATURED  
PRODUCT**D1300-2 SERIES****★★★ 250/lbs.**

LOAD CAPACITY

TYPE I  
DUTY RATING**STYLE: D-Rung Extension Ladder****Exclusive  
Alfio® rung  
joint means  
Twist-Proof®  
performance**Mar-resistant  
end capsInterlocking  
side rails

Smooth operating pulley

Heavy duty  
modified  
I-beam  
side railsSlip-resistant  
Traction-Tred® D-rungsHeavy duty  
spring loaded  
locks operate  
smoothlyDurable shoe rests flat  
or is held in spur position  
with Shu-Lok® featureModel  
D1320-2**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1816-2EQ‡	16'	13'	6.5	31.5
D1820-2EQ	20'	17'	8.1	37.5
D1824-2EQ	24'	21'	9.6	45.5
D1828-2EQ	28'	25'	11.2	56.0

‡ Note: D1816-2EQ is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3" wide	Fly Width:	14-1/4" outside rails
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails
Rungs:	1-3/4"		(20-3/4" to outside of feet)

**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1316-2‡	16'	13'	5.8	26.0
D1320-2	20'	17'	7.2	32.5
D1324-2	24'	21'	8.6	40.0
D1328-2	28'	25'	10.0	50.5
D1332-2	32'	29'	11.5	63.5
D1336-2	36'	32'	13.0	77.5
D1340-2	40'	35'	14.4	85.5

‡ Note: D1316-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails

**D1700-2EQ SERIES****★★ 225/lbs.**

LOAD CAPACITY

TYPE II  
DUTY RATING**STYLE: Extension Ladder with Integrated Leveling****Exclusive**  
Alflo® rung  
joint means  
Twist-Proof®  
performanceLightweight  
aluminumSlip-resistant  
Traction-Tred®  
D-rungsSpring-loaded  
locks operate  
smoothly**FEATURED  
PRODUCT**Model  
D1724-2EQ**THE Equalizer®**  
ELIMINATES UNEVEN GROUNDFactory installed adjustable  
EverLevel® leveling system  
exceeds OSHA and ANSI  
requirementsEasily adjustable in  
3/8" increments up to 8-1/4"Convenient built-in bubble  
levelDual action foot for use on  
hard or penetrable surfaces**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1716-2EQ‡	16'	13'	6.5	27.5
D1720-2EQ	20'	17'	8.1	32.5
D1724-2EQ	24'	21'	9.6	39.0
D1728-2EQ	28'	25'	11.2	48.5

‡ Note: D1716-2EQ is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3" wide	Fly Width:	14-1/4" outside rails
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails (20-3/4" to outside of feet)
Rungs:	1-3/4"		

**D1200-2 SERIES****★★ 225/lbs.**

LOAD CAPACITY

TYPE II  
DUTY RATING**STYLE: D-Rung Extension Ladder****Exclusive**  
Alflo® rung  
joint means  
Twist-Proof®  
performance

Smooth operating pulley

Mar-resistant  
end capsSlip-resistant  
Traction-Tred® D-rungsInterlocking  
side railsStrong modified  
I-beam railsSpring loaded  
locks operate  
smoothlyShoe rests flat or is  
held in spur position  
with Shu-Lok® featureModel  
D1220-2**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1216-2‡	16'	13'	5.8	22.0
D1220-2	20'	17'	7.2	27.0
D1224-2	24'	21'	8.6	33.5
D1228-2	28'	25'	10.0	43.0
D1232-2	32'	29'	11.5	54.0
D1236-2	36'	32'	13.0	62.5
D1240-2	40'	35'	14.4	73.5


‡ Note: D1216-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1" wide	Base Width:	17-3/8" outside rails

**D1100-2 SERIES**★ **200**/bs. LOAD CAPACITYTYPE III  
DUTY RATING**STYLE: D-Rung Extension Ladder**

**Exclusive**  
Alflo® rung  
joint means  
Twist-Proof®  
performance

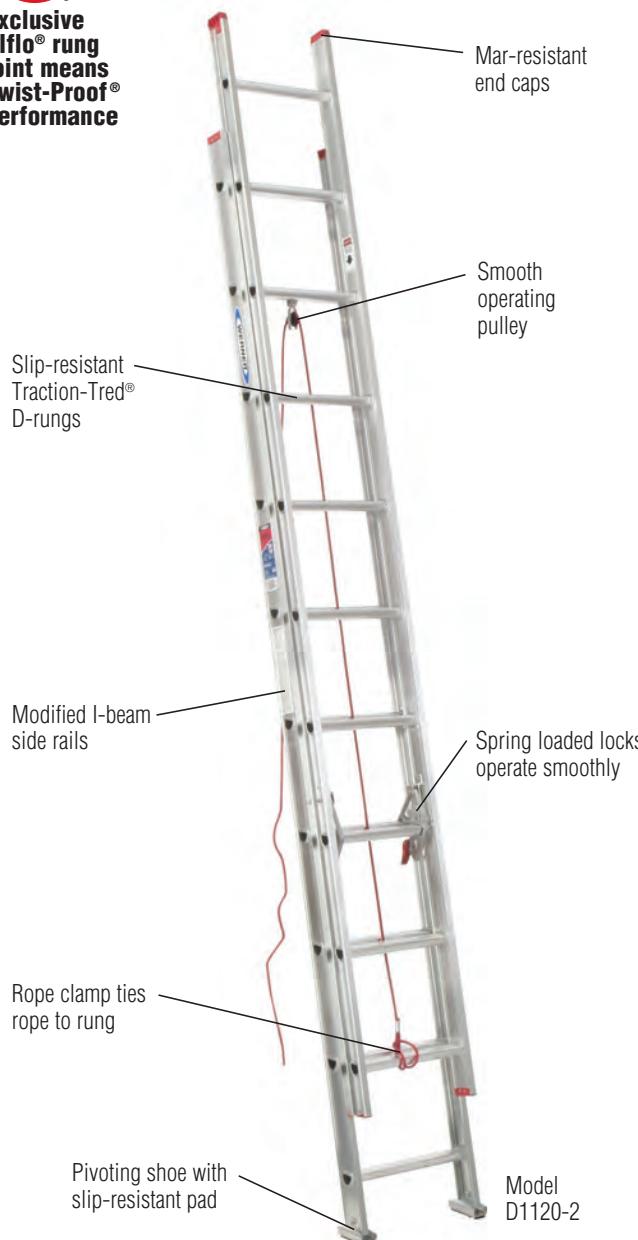**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1116-2‡	16'	13'	4.9	18.5
D1120-2	20'	17'	6.2	23.0
D1124-2	24'	21'	7.4	30.0
D1128-2	28'	25'	9.0	38.5

‡ Note: D1116-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	2-3/4" wide (16' & 20') 3" wide (24' & 28')	Rungs:	1-1/2"
Flange:	15/16" wide	Base Width:	16" outside rails

**D716-2 MODEL**★ **200**/bs. LOAD CAPACITYTYPE III  
DUTY RATING**STYLE: D-Rung Extension Ladder**

**Exclusive**  
Alflo® rung  
joint means  
Twist-Proof®  
performance










**SPECIFICATIONS**

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D716-2	16'	13'	4.6	17.5

**DIMENSIONS**


Rails:	2-1/2" wide	Rungs:	1-1/4"
Flange:	3/4" wide	Base Width:	15-3/4" outside rails

# ALUMINUM EXTENSION LADDER COMPARISON CHART

Features and Benefits	D500-2 SERIES TYPE IAA/IA	D1500 SERIES TYPE IA	D1800-2EQ SERIES TYPE I	D1300-2 SERIES TYPE I	D1700-2EQ SERIES TYPE II	D1200-2 SERIES TYPE II	D1100-2 SERIES TYPE III	D716-2 MODEL TYPE III
 Rope clamp ties rope to rung	★	★	★	★	★	★	★	
 Heavy duty shoe with slip-resistant tread and spur plate	★							
Removable sections for use as a single ladder	★	★						
 External guide brackets			★					
 Pivoting shoe							★	★
 Slip-resistant shoe with Shu-lok® feature and spur plate		★	★	★	★	★		
 Interlocking side rails	★		★	★	★	★	★	
 Rope and pulley system	★	★	★	★	★	★	★	
 Spring loaded locks	★	★	★	★	★	★	★	
 Modified I-beam rails	★	★	★	★	★	★	★	★
 Alflo® rung joint for Twist-Proof® performance	★	★	★	★	★	★	★	★
 Mar-resistant end caps	★	★	★	★	★	★	★	★
 Slip-resistant Traction-Tred® D-rungs	★	★	★	★	★	★	★	★
 Integrated Leveling			★		★			



## MT SERIES

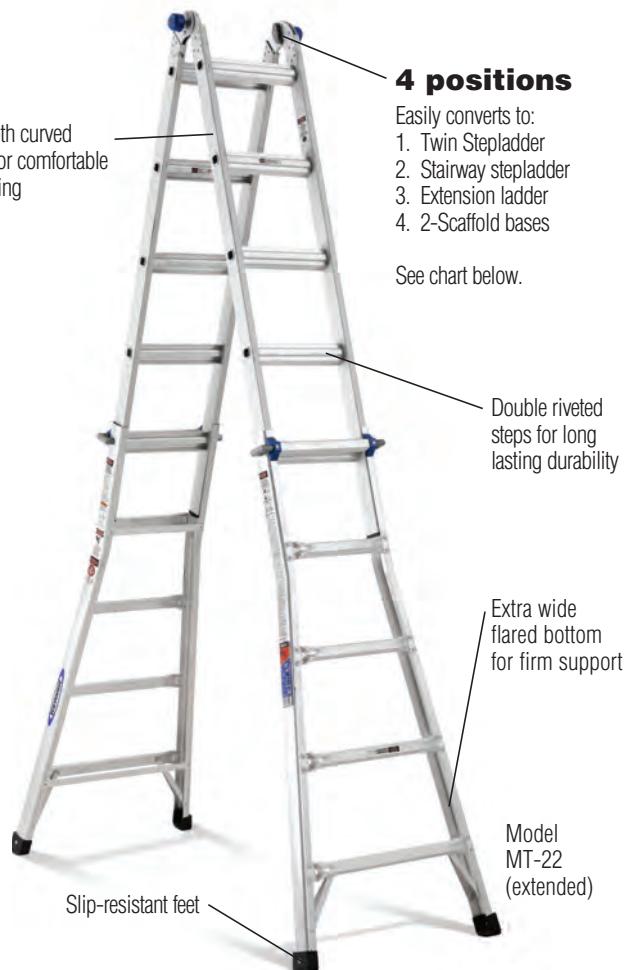★★★★ **300** lbs. LOAD CAPACITY  
**PER SIDE**TYPE IA  
DUTY RATINGSTYLE: Telescoping MultiLadder<sup>††</sup>

- Telescoping design for maximum versatility



\*Position 4 requires plank and tie downs not included.

## SPECIFICATIONS

Model No.	Stepladder Height	Extension Height	Stair Height	Scaffold Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
MT-13	3' to 5'	7' to 11'	3' to 5'	1' to 2'	5.9	31.5
MT-17	4' to 7'	9' to 15'	4' to 7'	1' to 3'	6.9	39.5
MT-22	5' to 9'	11' to 19'	5' to 9'	1' to 4'	10.8	47.0
MT-26	6' to 11'	13' to 23'	6' to 11'	1' to 5'	12.3	62.6

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

Rails:	2-5/8" wide	Rungs:	1" wide
Flange:	1" wide	Ladder Width:	16" wide

## M1 SERIES

★★★★ **300** lbs. LOAD CAPACITY  
**PER SIDE**TYPE IA  
DUTY RATINGSTYLE: Folding MultiLadder<sup>††</sup>

## 18 positions

1. Double stepladder<sup>††</sup>
2. Stepladder
3. Stairwell ladder
4. Multi-shelf
5. Stand-off ladder
6. Fully extended straight ladder
7. 1/2 & 3/4 length straight ladder
8. Self-supporting scaffold
9. Extended span scaffold
10. Stairwell scaffold

## PLUS OTHERS

Note: Set-up of some positions requires additional equipment, not included

- Shippable by ground parcel services

## SPECIFICATIONS

Model No.	Closed Height	Scaffold Height	Stepladder Height	Straight Ladder Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
M1-6-12	40-5/8"	3'	6'	12'	4.0	33.5
M1-8-16	52-5/8"	4'	8'	16'	5.2	39.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

Rails:	2-1/2" wide	Rungs:	1-1/4" multi-directional round type
Flange:	1" wide	Ladder Width:	15" outside rails

## STYLE: Standard Angle Steel Warehouse Ladder

## STYLE: Safety Angle Steel Warehouse Ladder



Slip-resistant perforated tread provides maximum slip-resistance and comfort when sitting or kneeling on steps.

Heavy 1-1/16" diameter tubular construction provides superior strength and long-lasting durability in the toughest environments.

Powder-coated paint finish provides a premium quality, scratch-resistant finish that is both durable and long-lasting.

First-step actuated locking system locks the ladder in place when an individual steps on the first step (standard on 6-step ladders and taller; spring-loaded casters used on smaller models). Locking system is standard on ALL Safety Angle models.



Gentle 50-degree incline for forward descent

## SPECIFICATIONS AND DIMENSIONS

Standard Angle Steel Warehouse Ladder (16" Step Width)					
Model No.	No. Steps.	Platform Height in.	Overall Height* in.	Base W x L in.	Approx. Shipping Wt. lbs.
No Handrail - All Welded (set-up)					
S01N16	1	12	12	17 x 19	14.0
No Handrail - Knocked Down (KD)					
S02N16	2	20	20	20 x 19	24.0
S03N16	3	30	30	20 x 27	34.0
S04N16	4	38	38	23 x 35	47.0
With Handrail - Knocked Down (KD)					
S02R16	2	20	52	20 x 19	28.0
S03R16	3	30	62	20 x 27	46.0
S04R16	4	40	76	23 x 35	58.0
S05R16	5	50	86	23 x 42	67.0
S06R16	6	60	96	27 x 50	76.0
S07R16	7	70	106	27 x 57	95.0

\*Overall height is platform height plus handrail height

Call factory for additional product offering

Step Width: 16"

Top Platform Depth: 10"

Step Depth: 7"

## SPECIFICATIONS AND DIMENSIONS

Safety Angle Steel Warehouse Ladder (16" Step Width)					
Model No.	No. Steps.	Platform Height in.	Overall Height* in.	Base W x L in.	Approx. Shipping Wt. lbs.
With Handrail - All Welded (set-up)					
SF03R16	3	30	66	23 x 41	67.0
With Handrail - Knocked Down (KD)					
SF04R16	4	40	76	23 x 49	81.0
SF05R16	5	50	86	23 x 58	100.0
SF06R16	6	60	96	27 x 66	114.0
SF07R16	7	70	106	27 x 74	126.0

\*Overall height is platform height plus handrail height

Call factory for additional product offering

Step Width: 16"

Step Depth: 8-1/2"

Top Platform Depth: 17"

Standard Angle Steel Warehouse Ladder (24" Step Width)					
Model No.	No. Steps.	Platform Height in.	Overall Height* in.	Base W x L in.	Approx. Shipping Wt. lbs.
No Handrail - All Welded					
S01N24	1	12	12	17 x 27	18.0
No Handrail - Knocked Down (KD)					
S02N24	2	20	20	28 x 19	30.0
S03N24	3	30	30	28 x 27	41.0
S04N24	4	40	40	31 x 35	55.0
With Handrail - Knocked Down (KD)					
S02R24	2	20	52	28 x 19	45.0
S03R24	3	30	66	28 x 27	56.0
S04R24	4	40	76	31 x 35	66.0
S05R24	5	50	86	31 x 42	79.0
S06R24	6	60	96	34 x 50	109.0
S07R24	7	70	106	34 x 57	121.0
S08R24	8	80	116	34 x 63	151.0
S09R24	9	90	126	34 x 70	170.0
S10R24	10	100	136	34 x 77	198.0
S11R24	11	110	146	34 x 83	214.0
S12R24	12	120	156	34 x 90	228.0
S13R24	13	130	166	39 x 97	289.0
S14R24	14	140	176	39 x 104	298.0
S15R24	15	150	186	39 x 110	311.0
S16R24	16	160	196	42 x 116	322.0

\*Overall height is platform height plus handrail height

Call factory for additional product offering

Step Width: 24"

Top Platform Depth: 10"

Step Depth: 7"

Safety Angle Steel Warehouse Ladder (24" Step Width)					
Model No.	No. Steps.	Platform Height in.	Overall Height* in.	Base W x L in.	Approx. Shipping Wt. lbs.
With Handrail - All Welded (set-up)					
SF03R24	3	30	66	28 x 41	78.0
With Handrail - Knocked Down (KD)					
SF04R24	4	40	76	28 x 49	91.0
SF05R24	5	50	86	28 x 58	106.0
SF06R24	6	60	96	34 x 66	131.0
SF07R24	7	70	106	34 x 74	157.0
SF08R24	8	80	116	34 x 82	182.0
SF09R24	9	90	126	34 x 91	202.0
SF10R24	10	100	136	34 x 99	207.0
SF11R24	11	110	146	34 x 107	232.0
SF12R24	12	120	156	34 x 116	256.0

\*Overall height is platform height plus handrail height


Call factory for additional product offering

Step Width: 24"

Top Platform Depth: 17"

NOTE: Special freight terms and discounts apply to steel products; call your sales representative or customer service for more details.

## A SERIES

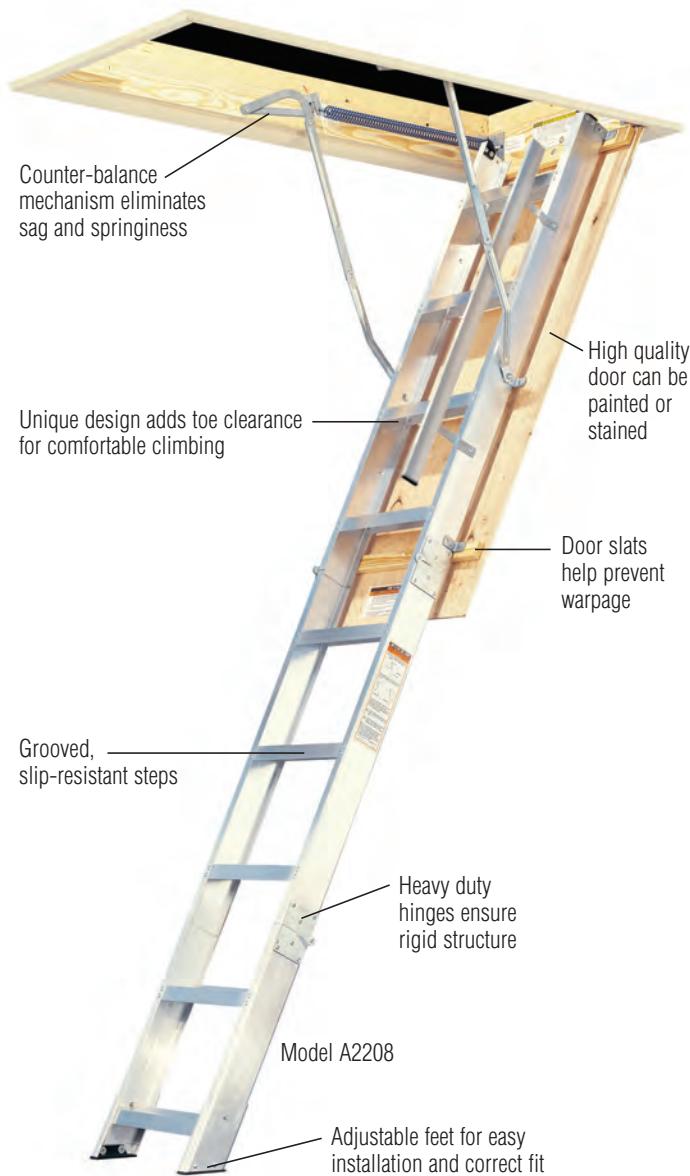★★★★ **300 lbs.** LOAD CAPACITY**STYLE: Aluminum Folding Attic Ladder**

- Lightweight easy to open, close and install
- Attractive – will not splinter, decay or rust

**SPECIFICATIONS**

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
A2208	22-1/2" x 54"	7' to 8'9"	14-5/8"	8.2	53.0
A2210	22-1/2" x 54"	8'9" to 10'4"	14-5/8"	8.2	57.0
A2508	25-1/2" x 54"	7' to 8'9"	17-5/8"	9.3	55.0
A2510	25-1/2" x 54"	8'9" to 10'4"	17-5/8"	9.3	59.0
A2512	25-1/2" x 64"	10'5"** to 12'	17-5/8"	10.5	74.0

\*To adjust to 10'5" height, cut off 12" from bottom

**DIMENSIONS**

Rails:	3-1/2" wide	Steps:	3-11/16" wide
Flange:	1" wide		

**AL2210 MODEL**★★★★ **300 lbs.** LOAD CAPACITY**STYLE: Aluminum Universal Attic Ladder**

 **NO BULKY SPRINGS**

**NEW STRUT DESIGN**  
**U.S. PATENT PENDING**

- Fits all ceiling heights from 8' to 10'

**SPECIFICATIONS**

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
AL2210	22-1/2" x 54"	7'8" to 10'3"	16-1/4"	7.6	49.5

**DIMENSIONS**

Rails:	2-3/8" wide	Steps:	3" x 14-1/2"
--------	-------------	--------	--------------

**AA SERIES****★★★ 250/lbs.**

LOAD CAPACITY

**STYLE: Aluminum Universal Telescoping Attic Ladder****SPECIFICATIONS**

Model No.	Size	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
AA8	8'	22" x 22"	7'4" to 8'4"	19-7/8"	2.6	44.0
AA10	10'	22" x 22"	7'4" to 10'3"	23-3/8"	2.9	50.0

**DIMENSIONS**

Rails:	3/4" x 1-3/4" wide	Steps:	2-7/8" wide
--------	--------------------	--------	-------------

**WH SERIES****★★★ 350/lbs.**

LOAD CAPACITY

**STYLE: Wood Folding Heavy Duty Attic Ladder****SPECIFICATIONS**

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
WH2208	22-1/2" x 54"	7' to 8'9"	14-1/2"	12.3	68.0
WH2210	22-1/2" x 54"	8'9" to 10'3"	14-1/2"	12.3	76.0
WH2508	25-1/2" x 54"	7' to 8'9"	17-1/2"	14.0	70.0
WH2510	25-1/2" x 54"	8'9" to 10'3"	17-1/2"	14.0	78.0
WH3008	30" x 54"	7' to 8'9"	22"	16.4	94.0
WH3010	30" x 54"	8'9" x 10'3"	22"	16.4	100.0

**NOMINAL DIMENSIONS**

	Actual Lumber Size	Rough Lumber Size
Rails:	3/4" x 4-1/2"	1" x 5"
Grooved Steps:	3/4" x 5-1/2"	1" x 6"

**WSERIES****★★★ 250/lbs.**

LOAD CAPACITY

**STYLE: Wood Folding Attic Ladder****SPECIFICATIONS**

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
W2208	22-1/2" x 54"	7' to 8'9"	14-1/2"	8.2	53.0
W2210	22-1/2" x 54"	8'9" to 10'4"	14-1/2"	8.2	55.0
W2508	25-1/2" x 54"	7' to 8'9"	17-1/2"	9.3	55.0
W2510	25-1/2" x 54"	8'9" to 10'4"	17-1/2"	9.3	58.0

**NOMINAL DIMENSIONS**

	Actual Lumber Size	Rough Lumber Size
Rails:	3/4" x 3-1/2"	1" x 4"
Grooved Steps:	3/4" x 3-1/2"	1" x 4"

## ATTIC LADDER COMPARISON CHART

Product Advantages	A SERIES	AL2210 MODEL	AA SERIES	WH SERIES	W SERIES
Material	Aluminum	Aluminum	Aluminum	Wood	Wood
Style	Folding	Folding	Telescoping	Folding	Folding
Size	8 ft. 10 ft. 12 ft.	10 ft.	8 ft. 10 ft.	8 ft. 10 ft.	8 ft 10 ft.
Load Capacity	300 lbs.	300 lbs.	250 lbs.	350 lbs.	250 lbs.
Ceiling Height Range	7' to 12'	7' 8" to 10' 3"	7' 4" to 10' 3"	7' to 10' 3"	7' to 10' 4"
Locking Device	Spring	Gas Strut	N/A	Spring	Spring
Opening Device	Rope	Rope	Push/Pull Rod	Rope	Rope
Door Material	Plywood	Plywood	Not Included	Plywood	Plywood
Frame Material	Pine	Pine	N/A	Pine	Pine
Full Width Door Hinge	Yes	Yes	No	Yes	Yes
Metal-to-Metal Rail Hinge	Yes	Yes	N/A	Yes	Yes
Requires Cutting Foot Angle	No	No	No	Yes	Yes
Number of People for Installation	Two	Two	One	Two	Two
Step Depth	3-1/4"	3"	2-7/8"	5-1/2"	3-1/2"
Finished Rails with Eased Edges	3-1/2" wide	2-3/8" wide	1-3/4" wide	4-1/2" wide	3-1/2" wide
Approximate Shipping Weight	53-74 lbs.	49.5 lbs.	44-50 lbs.	68-100 lbs.	53-58 lbs.

## ESC SERIES

SUPPORTS UP TO **1200 lbs.**

### STYLE: Built-In Fire Escape Ladder

#### WERNER BUILT-IN FIRE ESCAPE LADDER™



- Door included with unit.

### EVERY SECOND COUNTS ESCAPE FASTER.™



Permanent installation.  
Always there when you  
need it.



Deploys in seconds.  
Easy to use.



Faster escape.  
Supports up to 1200 lbs.

### SPECIFICATIONS

Model No.	Description	Ladder Length	Load Capacity Per Step	Product Weight Lbs.	Approx. Shipping Weight Lbs.
ESC220	2-story model	17' 2"	400 lbs.	16.0	17.5
ESC330	3-story model	24' 8"	400 lbs.	21.7	23.2

### DIMENSIONS

	ESC220 (2-story)	ESC330 (3-story)
Storage Pan Height:	8-1/2"	11"
Storage Pan Width:	15-1/4"	15-1/4"
Storage Pan Recess:	3-1/2"	3-1/2"
Distance Between Steps:	14-1/4"	14-1/4"

## AP-20-MP6 MODEL

★ **225 lbs.** LOAD CAPACITY

**TYPE II**  
DUTY RATING

### STYLE: Work Platform



- Merchandised in closed, upright position
- Packaged in quantities of 6



Work comfortably along walls and windows. Ideal for painting.



Multi-use platform

### SPECIFICATIONS

Model No.	Height <sup>‡</sup>	Width <sup>‡</sup>	Depth <sup>‡</sup>	Approx. Cu. Ft. <sup>‡</sup>	Approx. Shipping Wt. Lbs. <sup>‡</sup>
AP-20-MP6	41"	16-5/8"	35-3/4"	14.1	75.0

<sup>‡</sup> Note: Dimensions for packaged unit of 6

### DIMENSIONS

Top: 39-1/2" x 12"	Highest Standing Level: 20-9/16"
--------------------	----------------------------------

**PS-48 MODEL**  
**500/lbs.** LOAD CAPACITY

**STYLE: Portable Scaffold**



Multi-use S-Hooks make transportation easy and are ToolLasso® ready



- Versatile; can be used as push cart, storage shelf or work bench  
\*250 lbs. per plank (500 lbs. combined)

**SPECIFICATIONS**

Model No.	Height	Width	Depth	Approx. Cu. Ft Per Packaged Unit	Approx. Shipping Wt. Lbs.
PS-48	50-1/8"	46-1/8"	25-1/2"	3.4	60.0

**PLANK DIMENSIONS**

	Length	Width
Narrow Plank	46"	6"
Wide Plank	46"	10"

**SRS-72 MODEL**  
**1000/lbs.** LOAD CAPACITY\*

**STYLE: 6' Steel Rolling Scaffold**

Sections stack easily when casters are removed (2 high maximum)

Platform height adjustable in 2" increments for unique working heights and uneven surfaces



- Easy one-person assembly- No tools required for quick setup and tear down.

\*1000 lbs. load capacity distributed evenly

**DIMENSIONS**

Model No.	Approx. Width	Approx. Length	Approx. Height	Approx. Shipping Wt. Lbs.
SRS-72	29-1/2"	73-3/4"	74-7/8"	143.5

**COMPONENT DIMENSIONS**

Component	Quantity Included	Approx. Width	Approx. Length	Approx. Height
Frames	2	29"	68-3/4"	1-1/2"
Arm Braces	2	1-1/2"	73-7/8"	17-7/8"
Plywood Deck	1	28-1/2"	66-3/4"	1-1/2"
Locking Casters	4	5-1/8"	9-7/8"	--


**ACCESSORIES (AVAILABLE SEPARATELY)**

Model No.	Description	Approx. Width	Approx. Length	Approx. Height	Approx. Shipping Wt. Lbs.
SRO-72-4	Outriggers (4-pc master carton)	18"	20-3/4"	--	37.5
SRG-72	Guard Rail and Toeboard Kit	28-7/8"	69-5/8"	42"	70.5
SRC-72-4	Casters (4-pc master carton)	5-1/8"	1-1/8"	9-7/8"	20.0
SRD-72	Plywood Deck	28-1/2"	66-3/4"	2"	32.5

Note: Outriggers and Guard Rails are required when working height reaches 10'

## PA200 SERIES – ALUMINUM EXTENSION PLANK

- 1 person, 250 lb. Load Capacity.
- For use on stepladders, telescoping multiladders, extension trestle ladders and extension and single ladders equipped with ladder jacks.

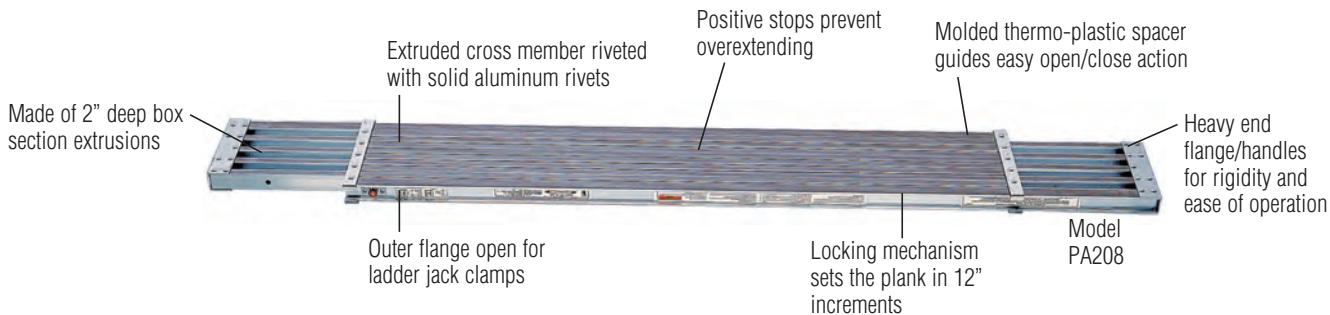

### SPECIFICATIONS

Model No.	Closed Position	Open Position	Approx. Width	Inner Rails	Outer Flanged Rails	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PA206	6'	9'	14"	1-1/8" x 2"	1-7/8" x 2"	1.5	31.0
PA208	8'	13'	14"	1-1/8" x 2"	1-7/8" x 2"	2.0	40.5
PA210	10'	17'	14"	1-1/8" x 2"	1-7/8" x 2"	2.5	56.5

Note: When assembled as scaffold or staging, these planks must be used in conjunction with suitable guard rail protection in compliance with applicable governmental codes, ordinances, regulations and safe practice.

## 5600 SERIES- 2-PIECE EXTRUDED ALUMA-BOARD™

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5607-19	75 lbs.	19-1/16"	7'	2"	30.0
5608-19**	75 lbs.	19-1/16"	8'	2"	34.0
5610-19	50 lbs.	19-1/16"	10'	2"	41.0



Model 5607-19

### FOR USE WITH STEEL SCAFFOLDS

## 5500 SERIES - ALUMINUM DECKED ALUMA-PLANK®

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5507-19	75 lbs.	19-1/16"	7'	3"	25.0
5508-19**	75 lbs.	19-1/16"	8'	4"	34.0
5510-19	75 lbs.	19-1/16"	10'	4"	43.0



Model 5507-19

### FOR USE WITH STEEL SCAFFOLDS

## 5300 SERIES - PLYWOOD DECKED ALUMA-PLANK®

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5307-19	75 lbs.	19-1/16"	7'	3-1/2"	27.0
5308-19**	75 lbs.	19-1/16"	8'	4-1/2"	38.0
5310-19	75 lbs.	19-1/16"	10'	4-1/2"	47.0
L5308-19	50 lbs.	19-1/16"	8'	3-1/2"	30.0
L5310-19	50 lbs.	19-1/16"	10'	4"	39.0
5307-24	75 lbs.	24"	7'	4"	32.0
5310-24	75 lbs.	24"	10'	4-1/2"	53.0



Model 5310-19

### FOR USE WITH STEEL SCAFFOLDS

\*\*Special Order Item

## ALUMINUM PUMP JACK SYSTEM

- Versatile, dependable and easy to operate
- Field replaceable components
- Compatible and interchangeable with the leading competitor



Note: When working 10 ft. and above, OSHA requires fall protection. Refer to product labels.

① Foldable Support Brace (PJ-SBF) 	② Nestable Stage (WNS 2512) 	③ Safety Net (PJ-SN) 	④ Work Bench (PJ-WB) 	⑤ Pump Jack (PJ-100) 	⑥ End Rail Kit (narrow) (PJ-ERN) 	⑦ 24' Aluminum Pole (PJ-24P) 
(Rigid Support Brace available) 	(other sizes available) 				PJ-ERW kit for wide span available 	Also available: 6' (PJ-6P) 12' (PJ-12P) 18' (PJ-18P) 

- Pump Jack
- Work Bench
- Poles and Braces
- Square Guard Rail
- Safety Net



## PUMP JACK COMPONENTS

Model No.	Description	Approx. Shipping Wt. Lbs.
PJ-100	Pump jack	30.0
PJ-PF-4	Pole foot	3.0
PJ-6P	6' aluminum pole	14.0
PJ-12P	12' aluminum pole	28.0
PJ-18P	18' aluminum pole	42.0
PJ-24P	24' aluminum pole	56.0
PJ-PC	Pole connector	12.0
PJ-SBF	Foldable support brace	9.0
PJ-SBR	Rigid support brace	14.0
PJ-WB	Work bench	15.0
PJ-ERN	End rail kit (narrow)	15.0
PJ-ERW	End rail kit (wide)	17.0
PJ-SN	Safety net	14.0

## Nestable Stages




- Continuous work platform reduces trip hazard
- 2 Person – 500 lbs. Rated

## NESTABLE STAGES


## 2-person - 500 lbs. rated

Model No.	Nestable Stage Description	Approx. Shipping Wt. Lbs.
WNS-2412	14" x 12'	46.0
WNS-2416	14" x 16'	63.0
WNS-2420	14" x 20'	86.0
WNS-2424	14" x 24'	115.0
WNS-2512	20" x 12'	54.0
WNS-2516	20" x 16'	75.0
WNS-2520	20" x 20'	103.0
WNS-2524	20" x 24'	122.0
WNS-2612	24" x 12'	62.0
WNS-2616	24" x 16'	81.0
WNS-2620	24" x 20'	116.0
WNS-2624	24" x 24'	139.0

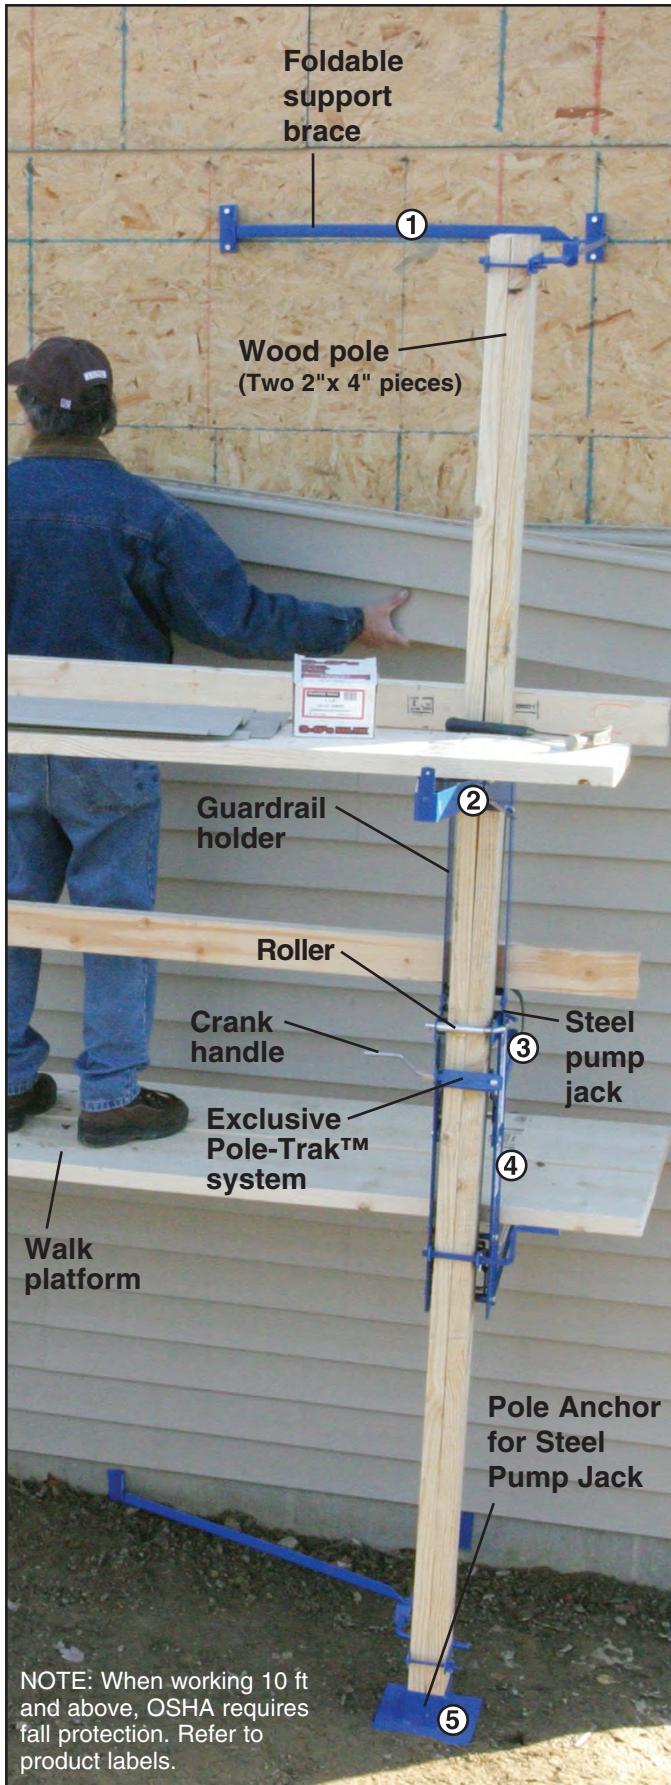

- Exclusive Pole-Trak™ system with rugged hand crank and safety brake
- Slip-resistant foot lever with oversized boot strap
- Accommodates up to a 24" wide plank
- Economical and easy to operate
- Meets ANSI and OSHA standards

- **Pump Jack**
- **Work Bench with Guard Rail Holder**
- **Pole Anchor**
- **Foldable Brace**

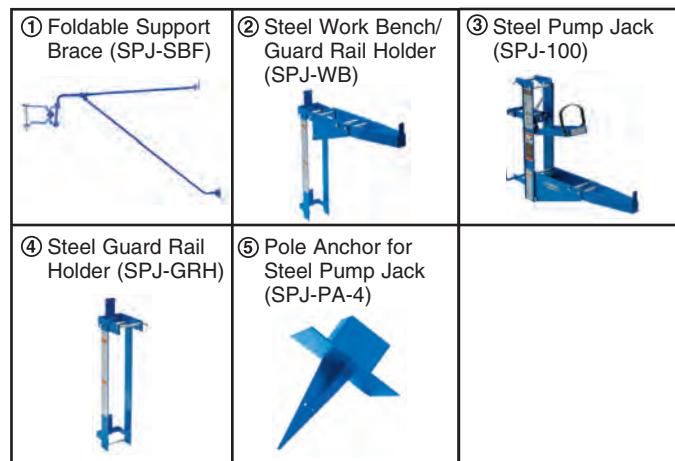


## COMPONENTS SHOWN

Description	Model Number	Product Weight (lbs)
① Foldable Support Brace	SPJ-SBF	7.0
② Steel Work Bench/ Guard Rail Holder	SPJ-WB	11.0
③ Steel Pump Jack	SPJ-100	23.0
④ Steel Guard Rail Holder	SPJ-GRH	5.5
⑤ Pole Anchor for Steel Pump Jack (Shipped in 4-packs)	SPJ-PA-4	5.5 (4-pk weight: 23.0)

## ALUMINUM TASK-MASTER® STAGES

- Twist-Proof® Stage Design
- Ideal for ladder jack applications, swing stages or catwalks

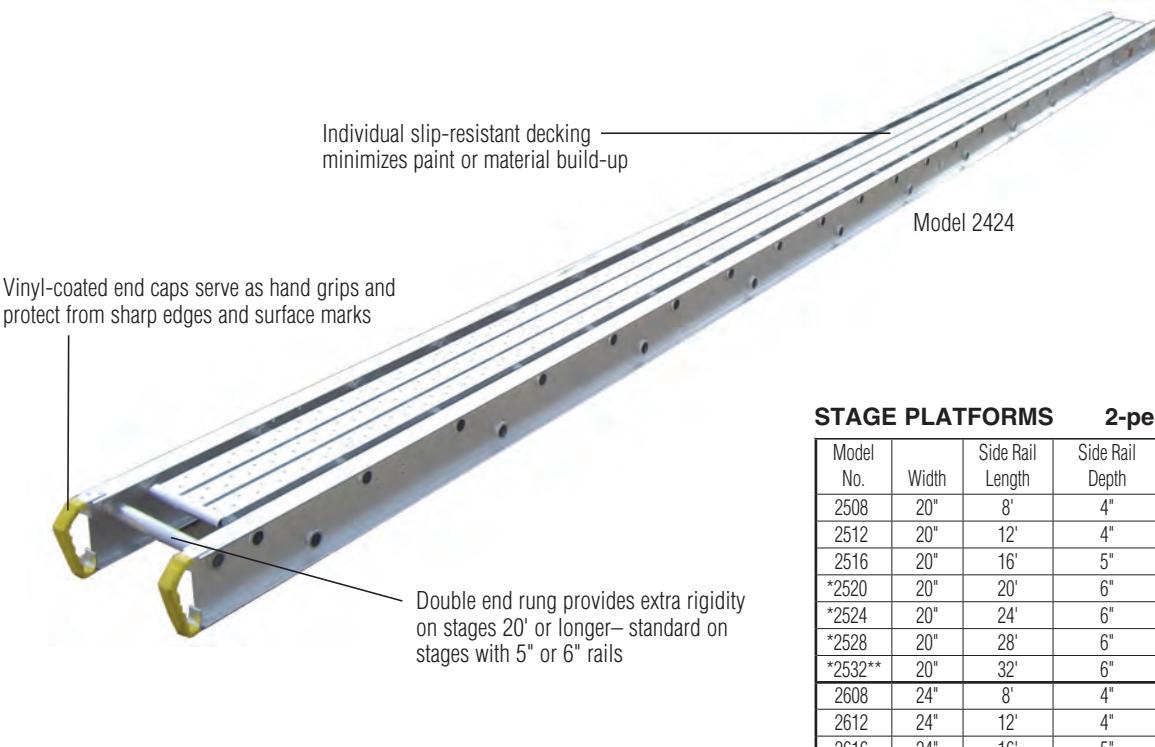

Model 2424

## DECORATOR PLANKS 1-person - 250 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2008	12"	8'	4"	1-3/8"	25.0
2012	12"	12'	4"	1-3/8"	36.0
2016	12"	16'	4"	1-3/8"	48.0
2020	12"	20'	5"	1-3/8"	65.0
2024	12"	24'	5"	1-3/8"	78.0

## SCAFFOLD PLANKS 2-person - 500 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2316	12"	16'	4"	1-3/8"	48.0
2320	12"	20'	6"	1-3/8"	79.0
2324	12"	24'	6" Heavy Duty	1-3/8"	112.0
2328	12"	28'	6" Heavy Duty	1-3/8"	131.0
2330	12"	30'	6" Heavy Duty	1-3/8"	140.0
2332	12"	32'	6" Heavy Duty	1-3/8"	149.0
2408	14"	8'	4"	1-3/8"	27.0
2412	14"	12'	4"	1-3/8"	40.0
2416	14"	16'	5"	1-3/8"	58.0
2420	14"	20'	6"	1-3/8"	85.0
2424	14"	24'	6"	2"	109.0
2428	14"	28'	6"	2"	127.0
2432**	14"	32'	6" Heavy Duty	2"	182.0


## STAGE PLATFORMS 2-person - 500 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2508	20"	8'	4"	1-3/8"	33.0
2512	20"	12'	4"	1-3/8"	48.0
2516	20"	16'	5"	1-3/8"	70.0
*2520	20"	20'	6"	1-3/8"	102.0
*2524	20"	24'	6"	1-3/8"	121.0
*2528	20"	28'	6"	2"	157.0
*2532**	20"	32'	6"	2"	179.0
2608	24"	8'	4"	1-3/8"	38.0
2612	24"	12'	4"	1-3/8"	56.0
2616	24"	16'	5"	1-3/8"	81.0
*2620	24"	20'	6"	1-3/8"	115.0
*2624	24"	24'	6"	1-3/8"	138.0
*2628	24"	28'	6"	2"	168.0
*2632	24"	32'	6"	2"	191.0
2708	28"	8'	4"	1-3/8"	41.0
2712	28"	12'	4"	1-3/8"	60.0
2716	28"	16'	5"	1-3/8"	87.0
*2720	28"	20'	6"	1-3/8"	124.0
*2724	28"	24'	6"	1-3/8"	147.0
*2728	28"	28'	6"	2"	187.0
*2732	28"	32'	6"	2"	213.0

## 3-person - 750 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
3112	24"	12'	4"	2"	64.0
3116	24"	16'	5"	2"	92.0
*3120	24"	20'	5"	2"	115.0
*3124	24"	24'	6"	2"	145.0
*3128	24"	28'	6" Heavy Duty	2"	204.0
*3132	24"	32'	6" Heavy Duty	2"	236.0
*3136**	24"	36'	6" Heavy Duty	2"	323.0
*3139**	24"	39'	6" Heavy Duty	2"	365.0
3208	28"	8'	4"	2"	48.0
3212	28"	12'	4"	2"	71.0
3216	28"	16'	5"	2"	103.0
3220	28"	20'	5"	2"	128.0
*3224	28"	24'	6"	2"	161.0
*3228	28"	28'	6" Heavy Duty	2"	220.0
*3232	28"	32'	6" Heavy Duty	2"	251.0
*3236†	28"	36'	6" Heavy Duty	2"	344.0
*3239†	28"	39'	6" Heavy Duty	2"	388.0

\*Includes set of double rungs at the end of stage. †Includes reinforcing channel

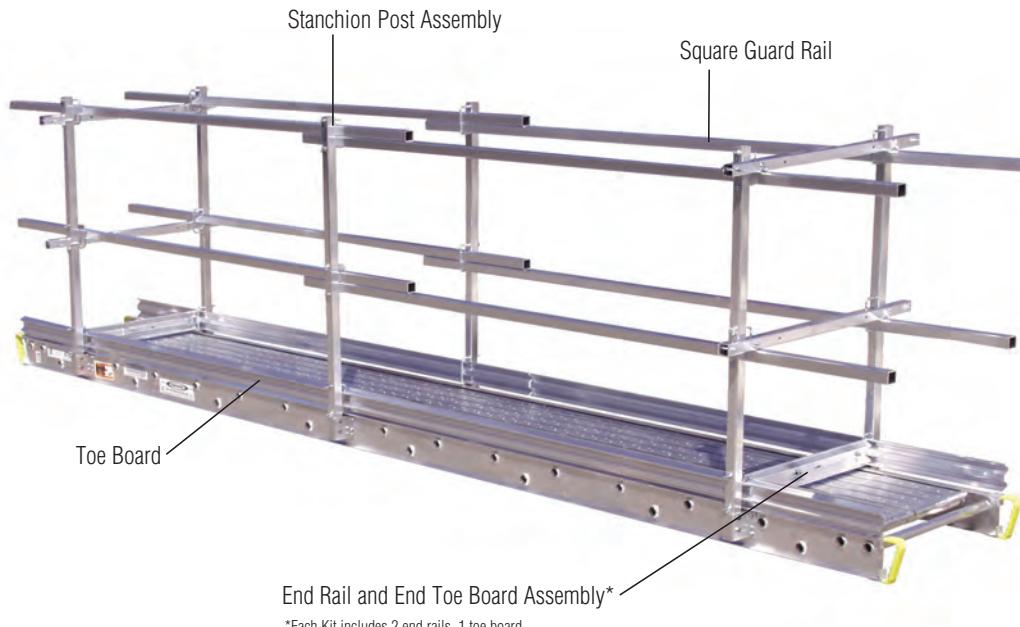

### SQUARE MODULAR GUARD RAIL SYSTEM

#### **System Sizing: How do I size a guard rail system?**

The following steps show how to size a single-sided, three-sided, and four-sided guard rail system:

- Step 1: Determine the stage length and width.
- Step 2: Determine whether guardrail system is one-, two-, three-, or four -sided.
- Step 3: Read across the row to determine component requirements.
- Step 4: If ordering a three- or four-sided system, order two ERT-N for 12" and 14" wide stages, and two ERT-W for all stages 20" wide or greater.

*Note: If ordering a two sided system, double the single sided component requirement.*

Model No.	Description	Approx. Shipping Wt. Lbs.
ERT-N	End rail and end toe board assembly - narrow	4.5
ERT-W	End rail and end toe board assembly - wide	7.0
SSP-47	Stanchion post assembly	5.0
SGR-09	1-1/2" square guard rail cut length - 108"	6.0
SGR-13	1-1/2" square guard rail cut length - 156"	8.5
STB-09	3-1/2" toe board cut length - 108"	4.5
STB-13	3-1/2" toe board cut length - 156"	6.5

Stage Length	Single-sided					Three-sided					Four-sided						
	SSP-47	SGR-09	SGR-13	STB-09	STB-13	SSP-47	SGR-09	SGR-13	STB-09	STB-13	ERT-N/ ERT-W*	SSP-47	SGR-09	SGR-13	STB-09	STB-13	ERT-N/ ERT-W*
8'	2	2	0	1	0	4	2	0	1	0	2	4	4	0	2	0	2
12'	3	0	2	0	1	5	0	2	0	1	2	6	0	4	0	2	2
16'	3	4	0	2	0	5	4	0	2	0	2	6	8	0	4	0	2
20'	4	2	2	1	1	6	2	2	1	1	2	8	4	4	2	2	2
24'	5	4	2	2	1	7	4	2	2	1	2	10	8	4	4	2	2
28'	6	2	4	1	2	8	2	4	1	2	2	12	4	8	2	4	2
32'	6	2	4	1	2	8	2	4	1	2	2	12	4	8	2	4	2
36'	6	10	0	5	0	8	10	0	5	0	2	12	20	0	10	0	2
39'	7	4	4	2	2	9	4	4	2	2	2	14	8	8	4	4	2

\*ERT-N is for 12" 14" wide stages; ERT-W is for 20" wide and greater stages

# ALUMINUM SCAFFOLDING

Werner aluminum scaffolding is best suited for construction and building maintenance applications, especially in high-traffic areas where mobility and appearance are important.

## CONSTRUCTION:

- Drywall
- Insulation
- Drop ceilings
- Ductwork

## BUILDING MAINTENANCE:

- Window and façade cleaning
- Changing light bulbs
- Painting
- Wallpapering

Aluminum scaffolding has benefits that steel scaffolding does not.

- More corrosion resistant
- Convenient - 30-50% lighter
- Easier and quicker to install
- Better on-site appearance

Werner offers scaffolding as towers, sections and individual components.

- Towers and sections for the one-time purchaser with limited scaffold knowledge
- Components for the regular purchaser with extensive knowledge on configuring a scaffold tower

Scaffolding can be used on inclines and stairs.

- For use on an incline, a scaffold tower must be secured to prevent movement.
- Scaffolding can be used on a stairway provided the horizontal braces from one end frame to the other are at the same level and adequate braces are used.

**NEW**  **5-DAY SHIPPING PROGRAM**



## ORDER TO SHIPPING WITHIN 5 BUSINESS DAYS\*

Minimum order for prepaid freight:  
1000 lbs. on product lines listed.



- Aluminum scaffolding systems
- 6' steel rolling scaffold (SRS-72)
- Scaffold components
- Nestable and standard stages and guard rail systems
- Scaffolding platforms (5300, 5500, 5600)
- Aluminum and steel pump jacks and components

\*Applicable to catalog items only - orders over 20 units will be evaluated for shipment confirmation. Please contact customer care for details.

- Easy and convenient to order.
- Takes the guesswork out of what is required to meet Code.
- Ideal for schools, hospitals and building maintenance.

Includes guard rails, toeboards and planks with access door that allows end users to climb from inside. 23' towers include additional fixed board (no access door). Outriggers included on all models except 4201-12, 4202-12 and 4203-12. These models meet the ANSI code as noted on Page 50 - "Notice".

## Narrow Span Towers

Platform Length	Total Width (W)	Total Length (L)
6'	9' 6"	9' 6"
8'	9' 6"	11' 6"
10'	9' 6"	13' 6"



**12' Platform Height**

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-12**	6'	29"	12'	15' 5"	359.0
4102-12	8'	29"	12'	15' 5"	389.0
4103-12**	10'	29"	12'	15' 5"	410.5



**18' Platform Height**

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-18**	6'	29"	17' 6"	20' 11"	405.0
4102-18	8'	29"	17' 6"	20' 11"	439.0
4103-18	10'	29"	17' 6"	20' 11"	462.5



**23' Platform Height**

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-23**	6'	29"	23'	26' 4"	451.0
4102-23	8'	29"	23'	26' 4"	489.0
4103-23	10'	29"	23'	26' 4"	514.5

**Load Capacity:** 25 lbs. per sq. ft.  
or 500 lbs. maximum per deck & scaffold.

\*\*Special Order Item

## Wide Span Towers

**12' Platform Height\***



Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-12**	6'	4-1/2'	12'	15' 5"	299.5
4202-12**	8'	4-1/2'	12'	15' 5"	338.0
4203-12**	10'	4-1/2'	12'	15' 5"	366.0

\*Does not require outriggers.

**18' Platform Height**



Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-18	6'	4-1/2'	17' 6"	20' 11"	561.5
4202-18**	8'	4-1/2'	17' 6"	20' 11"	610.0
4203-18**	10'	4-1/2'	17' 6"	20' 11"	643.0

Platform Length	Total Width (W)	Total Length (L)
6'	10' 10"	10' 10"
8'	10' 10"	12' 10"
10'	10' 10"	14' 7"

**23' Platform Height**



Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-23	6'	4-1/2'	23'	26' 4"	695.0
4202-23	8'	4-1/2'	23'	26' 4"	778.0
4203-23**	10'	4-1/2'	23'	26' 4"	862.0

Platform Length	Total Width (W)	Total Length (L)
6'	10' 10"	10' 10"
8'	10' 10"	12' 10"
10'	10' 10"	14' 7"


**Load Capacity:** 25 lbs. per sq. ft. or 500 lbs. per deck and 1,000 lbs. maximum per scaffold.

## SCAFFOLD SECTIONS

- Easy and convenient to order.
- Enables user to easily add to an existing scaffold tower.
- Ideal for painting and remodeling contractors.

## NARROW SPAN SCAFFOLD SECTIONS

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and scaffold

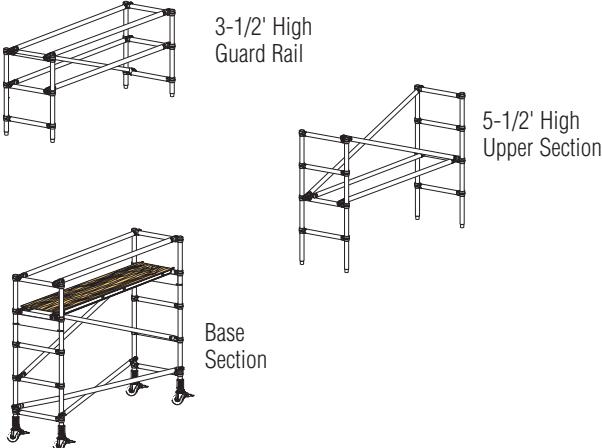


Model No.	Width	Length	Approx. Shipping Wt. Lbs.
<b>6' 6" to 7' 6" High Adjustable Base Sections</b>			
4101	29"	6'	121.0
4102	29"	8'	133.0
4103**	29"	10'	145.0
<b>6-3/4' High Upper Sections</b>			
4127**	29"	6'	60.0
4128**	29"	8'	65.0
4129	29"	10'	68.0
<b>5-1/2' High Upper Sections</b>			
4104	29"	6'	53.0
4105	29"	8'	58.0
4106	29"	10'	62.0
<b>4' High Upper Sections</b>			
4107	29"	6'	47.0
4108**	29"	8'	51.0
4109	29"	10'	55.0
<b>3-1/2' High Guard Rails</b>			
4110	29"	6'	44.0
4111	29"	8'	48.0
4112	29"	10'	52.0

\*\*Special Order Item

## SNAP-UP® NARROW SPAN FOLDING SCAFFOLDS

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and scaffold

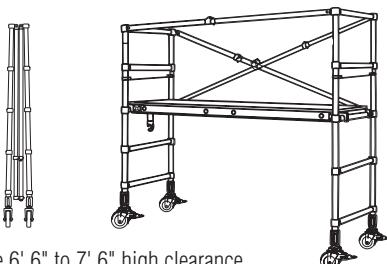


- Adjustable 6' 6" to 7' 6" high clearance

Model No.	Width	Length	Approx. Shipping Wt. Lbs.
SNB-6U	29"	6'	127.0
SNB-8U	29"	8'	139.0

## WIDE SPAN SCAFFOLD SECTIONS

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and 1000 lbs. maximum per scaffold

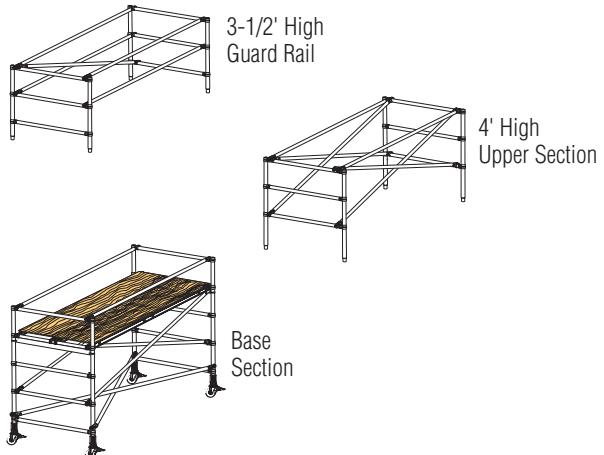


Model No.	Width	Length	Approx. Shipping Wt. Lbs.
<b>6' 6" to 7' 6" High Base Sections</b>			
4201	4-1/2'	6'	167.0
4202**	4-1/2'	8'	188.0
4203**	4-1/2'	10'	208.0
<b>5-1/2' High Upper Sections</b>			
4204**	4-1/2'	6'	71.0
4205**	4-1/2'	8'	76.0
4206**	4-1/2'	10'	81.0
<b>4' High Upper Sections</b>			
4207	4-1/2'	6'	62.0
4208**	4-1/2'	8'	68.0
4209**	4-1/2'	10'	73.0
<b>3-1/2' High Guard Rails</b>			
4210**	4-1/2'	6'	55.0
4211**	4-1/2'	8'	60.0
4212**	4-1/2'	10'	65.0

\*\*Special Order Item

## SNAP-UP® WIDE SPAN FOLDING SCAFFOLDS

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and 1000 lbs. maximum per scaffold

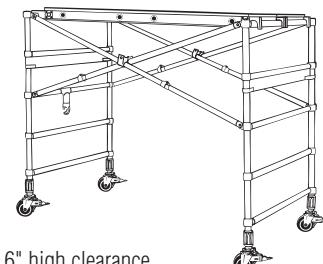

- Adjustable 6' 6" to 7' 6" high clearance

Model No.	Width	Length	Approx. Shipping Wt. Lbs.
SWB-6U	4-1/2'	6'	163.0
SWB-8U	4-1/2'	8'	181.0

# SCAFFOLD COMPONENTS

- Provides most flexibility during installation.
- Enables end user to easily convert to different length or height scaffold towers.
- All components available separately.
- Ideal for rental yards and theatrical and entertainment applications.

## FRAMES

Model No.	Description	Approx. Shipping Wt. Lbs.
<b>For Narrow Span, 29" Wide</b>		
FNB-80	Base end frame	35.0
FNU-81	6-3/4' H upper end frame	19.0
FNU-65	5-1/2' H upper end frame	15.0
FNU-49	4' H upper end frame	12.0
FNU-42	Guard rail end frame	11.5
<b>For Wide Span, 4-1/2" Wide</b>		
FWB-80	Base end frame	39.5
FWU-81	6-3/4' H wide span upper end frame	22.0
FWU-65	5-1/2' H upper end frame	19.0
FWU-49	4' H upper end frame	14.5
FWG-42	Guard rail end frame	14.5


## SCAFFOLD BOARDS

Model No.	Description	Approx. Shipping Wt. Lbs.
P22W-6	6' scaffold board	28.5
P22W-8	8' scaffold board	36.0
P22W-10	10' scaffold board	42.5
PD22W-6	22" wood deck with access door - 6' board	33.0
PD22W-8	22" wood deck with access door - 8' board	41.0
PD22W-10	22" wood deck with access door - 10' board	49.0


## BRACES

Model No.	Description	Approx. Shipping Wt. Lbs.
BD-6	6' diagonal brace	4.0
BD-8	8' diagonal brace	5.0
BD-10	10' diagonal brace	5.5
BH-6	6' horizontal brace	4.0
BH-8	8' horizontal brace	5.0
BH-10	10' horizontal brace	5.5
BN-6	6' narrow span horizontal-diagonal brace	4.0
BN-8	8' narrow span horizontal-diagonal brace	5.0
BN-10	10' narrow span horizontal-diagonal brace	6.0
BW-6	6' wide span horizontal-diagonal brace	5.0
BW-8	8' wide span horizontal-diagonal brace	5.5
BW-10	10' wide span horizontal-diagonal brace	6.0


## ACCESSORY KITS



**Kit No. 40-1**  
**SWIVEL LOCKING CASTER**



**Kit No. 41-1**  
**ONE SWIVEL BASE PLATE**



**Kit No. 43-1**  
**GUARD RAIL HOLDER**  
**A Werner Exclusive**


Includes four steel guard rail holders. With a set of guard rail holders, you can easily turn a horizontal brace into a guard rail.

**NOTE:** Guard Rail Holder fits Intermediate Scaffold Section Models: 4104-4109, 4127-4129, 4204-4209. They are not designed for Werner Co. Guard Rail Upper Section Models: 4110, 4111, 4112, 4210, 4211, 4212.

Kit No.	Description	Approx. Shipping Wt. Lbs.
40-1	One swivel locking caster with rubber tread. 8" dia. x 2" wide.	14.0
41-1	One swivel base plate for stairway and span type scaffolds	8.0
43-1	Guard Rail Holder fits intermediate scaffold section models: 4104-4109, 4127-4129, 4204-4209.	1.2

**NOTICE – ALL SCAFFOLDS:** Maximum scaffold platform height is equal to 4x the smaller base section dimension of the scaffold or installed outrigger in most states except California which requires 3x. Check state and local codes.


## OUTRIGGERS for Wide and Narrow Span Scaffolds

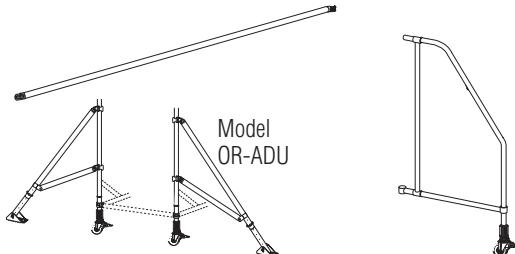

**Note:** Braces and Frames are ordered separately

Model No.	Description	Approx. Shipping Wt. Lbs.
BOR-N	Narrow span outrigger brace	4.0
BOR-W	Wide span stairway outrigger brace	5.0
FRO	Rolling outrigger frame (with every frame, a brace is needed)	18.0
OR-ADU	Adjustable 1' to 5' 6" wide for narrow or wide span scaffolds	11.0

## TOE BOARD SYSTEMS

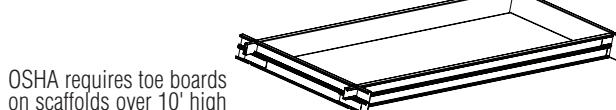

OSHA requires toe boards on scaffolds over 10' high

Model No.	Size	Approx. Shipping Wt. Lbs.
<b>Aluminum Toe Board Assemblies for 4100 Series</b>		
TN4A-6U	4" x 6'	18.0
TN4A-8U	4" x 8'	21.0
TN4A-10U	4" x 10'	25.0
<b>Aluminum Toe Board Assemblies for 4200 Series</b>		
TW4A-6U	4" x 6'	21.0
TW4A-8U	4" x 8'	25.0
TW4A-10U	4" x 10'	28.0

## SCAFFOLD/OUTRIGGER COMPONENT COMPARISON CHART

Scaffold Towers		Narrow Span (29" wide) Towers								Wide Span (4-1/2" wide) Towers									
Platform Length		6' Long			8' Long			10' Long		6' Long			8' Long			10' Long			
Component Model No.	Description	4101-12	4101-18	4101-23	4102-12	4102-18	4102-23	4103-12	4103-18	4103-23	4201-12	4201-18	4201-23	4202-12	4202-18	4202-23	4203-12	4203-18	4203-23
<b>FNB-80</b>	Adjustable Base Section	2	2	2	2	2	2	2	2	2									
<b>FNU-65</b>	5-1/2' Upper Section	2	4	6	2	4	6	2	4	6									
<b>FNG-42</b>	Guard Rail	2	2	2	2	2	2	2	2	2									
<b>FWB-80</b>	Adjustable Base Section										2	2	2	2	2	2	2	2	2
<b>FWU-65</b>	5-1/2' Upper Section										2	4	6	2	4	6	2	4	6
<b>FWG-42</b>	Guard Rail										2	2	2	2	2	2	2	2	2
<b>PD22W-6, -8, -10*</b>	Access Door Plank	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2
<b>P22W-6, -8, -10*</b>	Wood Deck										1	1	2	1	1	2	1	1	2
<b>BH-6, -8, -10*</b>	Horizontal Brace	8	10	12	8	10	12	8	10	12	8	10	12	8	10	12	8	10	12
<b>BD-6, -8, -10*</b>	Diagonal Brace	5	7	9	5	7	9	5	7	9	9	13	17	9	13	17	9	13	17
<b>BN-6, -8, -10*</b>	Horizontal-Diagonal	2	2	4	2	2	4	2	2	4									
<b>BW-6, -8, -10*</b>	Horizontal-Diagonal										2	2	4	2	2	4	2	2	4
<b>FRO</b>	Outrigger	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
<b>BOR-N, -W</b>	Outrigger Brace	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
<b>TN4A-6U, -8U, -10U</b>	Toe Board	1	1	2	1	1	2	1	1	2									
<b>TW4A-6U, -8U, -10U</b>	Toe Board										1	1	2	1	1	2	1	1	2

\*-6, -8, -10 refers to platform length. Add suffix to model number for corresponding platform length.

**FOLDING ARCHED RAMPS**

MODEL R522


**ARCHED FOR BOTH  
HIGH AND LOW CLEARANCE VEHICLES**

- Folds and locks for easy transporting
- Center rail and transition plate for smooth loading
- Multi-purpose - Ideal for all wheel sizes
- Easily hook together for small wheelbases
- Includes 2 ramps - No assembly required

**1500 lbs. Load Capacity Per Pair**

(750 lbs. evenly distributed load capacity per ramp)

Shipping Weight: 35.0 lbs.

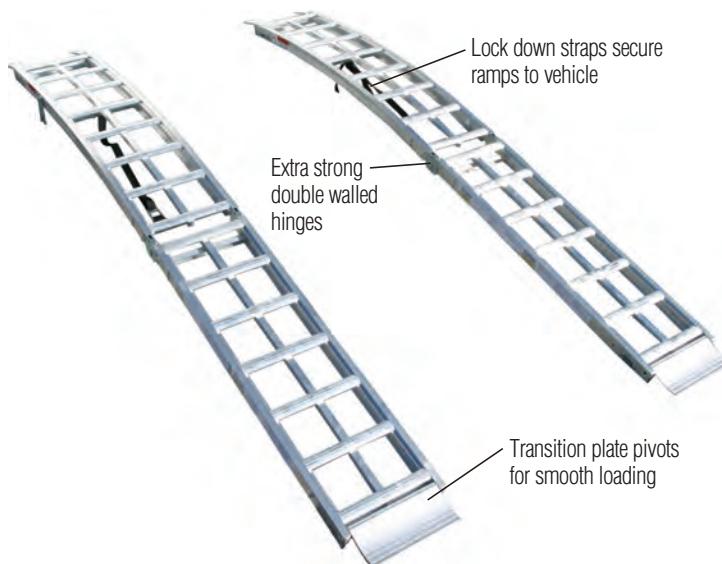**ARCHED RAMPS**

MODEL R402


**ARCHED FOR BOTH  
HIGH AND LOW CLEARANCE VEHICLES**

- Multi-purpose
- Easily hook together for small wheelbases
- Includes 2 ramps - No assembly required

**1400 lbs. Load Capacity Per Pair**

(700 lbs. evenly distributed load capacity per ramp)

Shipping Weight: 22.0 lbs.

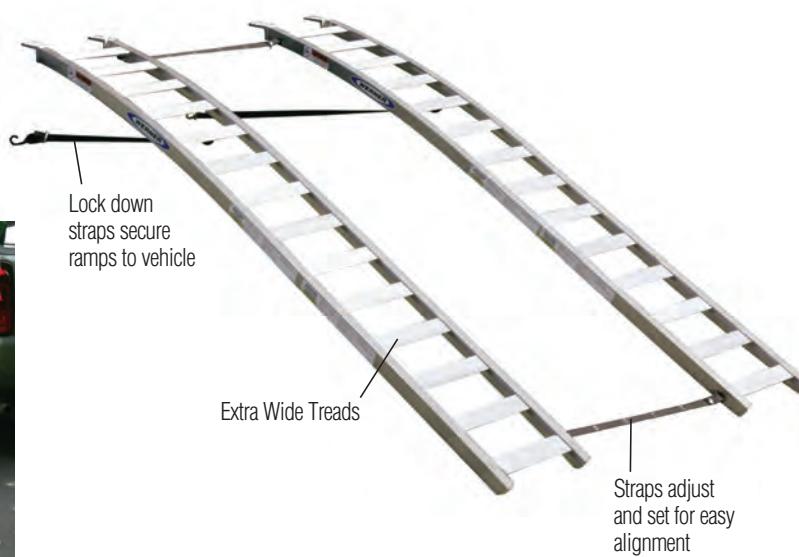

**RAMPS****STRAIGHT RAMPS**

MODEL R301

**STRAIGHT FOR  
HIGH CLEARANCE VEHICLES**

- Great for off-road vehicles
- Easily hook together for small wheelbases
- Includes 2 ramps - No assembly required

**1300 lbs. Load Capacity Per Pair**

(650 lbs. evenly distributed load capacity per ramp)

Shipping Weight: 20.0 lbs.

**STRAIGHT RAMP KIT**

MODEL R102

**STRAIGHT FOR  
HIGH CLEARANCE VEHICLES**

- Works with two 2x8, 2x10 or 2x12 planks (not included).
- Ideal for many uses. Use as a single ramp or a pair.
- Great for off-road vehicles.
- Safety straps secure ramps to vehicle.
- Includes hardware for 2 ramps.

**Up to 1400 lbs. Load Capacity Per Pair\***

(700 lbs. evenly distributed load capacity per ramp)

Shipping Weight: 6.0 lbs.

\*depending on material, grade and length of board



**STEEL REMOVABLE PICKUP TRUCK RACK****250 lbs. Load Capacity****MODEL TR101-S (black)****Shipping Weight: 50.0 lbs.**

Designed for work or play.  
Easily removes when not in use.



Includes predrilled uprights.



Cargo positioners & vinyl strips help protect cargo in transit.

**STEEL OVER CAB PICKUP TRUCK RACK****1,000 lbs. Load Capacity****MODEL TR501-S (black)****Shipping Weight: 125.0 lbs.**

Includes adaptor plates that allow rack to mount over most caps (750 lbs. load capacity). Also includes quick release rear bar feature.



Includes predrilled uprights.



Cargo positioners & vinyl strips help protect cargo in transit.

**KEY FEATURES (all racks)**

- Exclusive Vinyl Protector Strips:** Werner is the first in the industry to offer these as a standard feature to help protect your equipment against transit damage.
- Universal Design:** Werner Van & Truck Racks fit all vans with rain gutters and most pickup trucks with 6-1/2' to 8' long beds.

**STANDARD FEATURES**

- All Werner Van & Truck Racks are made of welded 14 gauge square tubular steel for added strength.
- Double layer of glossy powder coated finish and corrosion resistant hardware are standard for added durability.

## STEEL VAN RACK 600 lbs. Load Capacity MODEL VR101-W (white)

Shipping Weight: 40.0 lbs.



Includes predrilled uprights.



Cargo positioners & vinyl strips help protect cargo in transit.

3rd Bar Option Available

Standard - Model No. VR103-W (white)

Model No. VR104-W (white)

Shipping Weight: 21.0 lbs.



### Van Rack Compatibility Chart

Van Year	Make	Model	Type	VR101-W	VR103-W	VR104-W
Up to 1997	Chevy	1500-3500	All	✓	✓	
1998 & Up	Chevy/GMC	Express/Savanna	All	✓		✓
1998 & Up	Chevy/GMC	Express/Savanna	Standard	✓		✓
1982 & Up	Ford	E-150, 250, 350	Standard	✓		✓
1982 & Up	Ford	Super	Long	✓		✓
Up to 1999	Dodge	B-150, 250, 350	Standard	✓	✓	
2000 to 2003	Dodge	B-150, 250, 350	Standard			
Up to 1999	Dodge	Maxie Van	Long	✓	✓	
2000 to 2003	Dodge	Maxie Van	Long			
2004 & Up	Dodge	Sprinter (Passenger & Cargo Models)	Standard Roof	✓	✓	
2004 & Up	Dodge	Sprinter (Passenger & Cargo Models)	High Roof & Mega Roof			
All	All	Gutterless/Mini	All			

## MERCHANDISING MODULAR LADDER DISPLAYS & FIXTURES

### 55 END CAP DISPLAY



### 37 DISPLAY RACK



- Modular design for flexible retail footprint
- Easier access and organized ladder display
- Merchandises ladders and accessories
- Werner Performance System® signage included

#### SPECIFICATIONS

Model No.	No. of Ladders in Fixture	Overall dimensions	Method of Shipping	Approx. Shipping Wt. Lbs.
37 Display Rack	7	24-3/4" x 48" x 45-1/2"	UPS or Fed Ex	65.0
55 End Cap	14	50-1/2" x 49-1/2" x 85"	LTL	138.0

Please follow these steps and refer to the chart below for purchasing a ladder accessory that is factory installed. Certain combinations of factory installed accessories to the same ladder are also available. Lead time for factory installed accessories may vary depending on availability. If you have a question or need assistance, please call customer service at 1-888-523-3371.

Step 1: Locate the ladder's model number and add an X on to the end of the model number.

Step 2: Use the chart provided and find the accessory you want attached. Add the 4 digit designator to the end of the ladder model number after the X.

Example: Ladder Model Number: D6220-2

Add the X to signify factory installation: D6220-2X

Accessory to install: APK80

Locate accessory on chart and find that "0004" designates this accessory being added.

**MODEL TO ORDER: D6220-2X0004**

Attached Accessories	Description	4-Digit Designator
A61	Combination Spur-Hoop Shoe	0038
A71	Padded Fixed V-Rung	0005
A72	Adjustable Pole Strap	0008
A74	Cable Hooks	0003
A78	Fly Section Shoe	0058
A81	Adjustable Pole Lashes	0089
A83	Rubber Padded Shoe	0049
A86	Spur Shoe	0007
A92	Cable Hook and V-Rung Assembly	0002
APK70	LeveLok® Ladder Leveler with 2 base units	0086
APK80	Level-Master Automatic Ladder Levelers	0004


See price list for added cost.

Werner's illustrations are representative and may not include all styles.

All accessories, attachments, and replacement parts are designed and tested for Werner Co. products only.



PaintCup &amp; PaintCupLiner

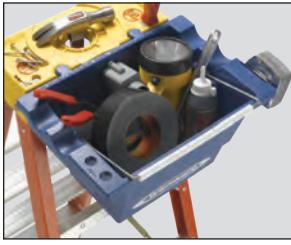

JobBucket



UtilityBucket



JobCaddy




UtilityHook



ToolLasso®

# CUSTOMIZE YOUR LADDER TOP

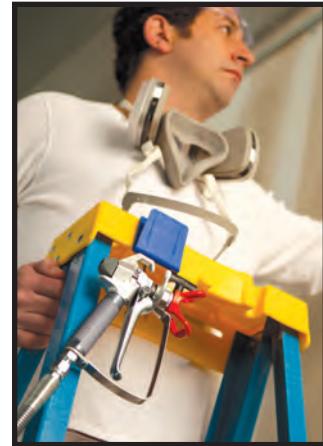

## AC27-P

### Paint Cup



- Great for trim painting and cut-in applications
- Built-in magnet to secure a paint brush
- Holds 1 quart of paint
- Can be used with disposable Paint Cup Liner AC27-L

Model No.	Fits on
AC27-P	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000, AC24

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
9-1/8" x 13-3/4" x 10-7/8"	4.0

*Shipping quantity  
(6) units per carton*

## AC27-L

### Paint Cup Liner



- Disposable liner makes clean up easy
- Each AC-27L unit includes 4 liners

Model No.	Fits on
AC27-L	AC27-P

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
5-1/8" x 13-3/8" x 10"	2.2

*Shipping quantity  
(10) units per carton  
(40) liners per carton*

## AC50-JB-3

### Job Bucket




- Increase ladder storage and maximize your work space
- Great for all trades: electrical, maintenance, plumbing, construction
- Integrated tape measure and screwdriver holders
- Top grooves hold round pipes in place
- 600 cubic inches of storage, 25 lbs. load capacity

Model No.	Fits on
AC50-JB-3	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
15-1/4" x 11-7/8" x 16-1/4"	6.6

*Shipping quantity  
(3) units per carton*

# TAKE LESS TRIPS UP THE LADDER

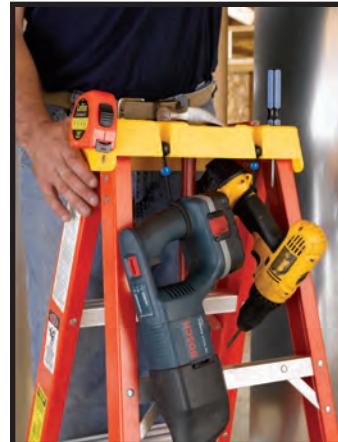

## AC52-UB

### Utility Bucket



- Expand your work surface
- Great for jobsite or household use
- Integrated Lock-In Socket for adding Paint Cup, ToolLasso® or Utility Hook
- Ideal for wet or dry applications
- Holds up to one gallon of liquid, 25 lbs. capacity

Model No.	Fits on
AC52-UB	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
13-1/2" x 10-3/4" x 10-3/4"	4.5

*Shipping quantity  
(3) units per carton*

## AC54-JC

### Job Caddy



- Holds large or odd shaped items like fluorescent bulbs or ceiling fan blades
- 4 storage compartments keep small parts separated
- Screwdriver, pliers, putty knife & towel holders
- End hook built in for increased convenience
- Integrated Lock-In Socket for adding Paint Cup, ToolLasso® or Utility Hook

Model No.	Fits on
AC54-JC	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
15-1/2" x 8-3/8" x 10-3/8"	6.7

*Shipping quantity  
(3) units per carton*

## AC56-UH

### Utility Hook



- Keep cords from getting tangled in your ladder
- Organize cords and keep them within reach
- Holds extension cords, air hoses, garden hoses, stands of lights, paint sprayers and other tools or project materials

Model No.	Fits on
AC56-UH	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
9-3/4" x 13-1/2" x 8"	2.8

*Shipping quantity  
(10) units per carton*

## AC58-TL

### ToolLasso®



- Secures tools from falling
- Wraps around the grip of power tools, hand tools and caulk guns
- Locks into HolsterTop® to keep tools safe and ready to use
- Compatible with the ToolLasso® belt clip
- AC58-TL includes 1 belt clip and 2 ToolLassos

Model No.	Fits on
AC58-TL	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000, AC24, PS-48

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
10-7/8" x 12-1/4" x 9-3/4"	4.0

*Shipping quantity  
(12) units per carton*

## STEPLADDER ACCESSORIES


**AC11****Stepladder Hanger**

Hanger can be mounted on a wall to hold stepladders. Industrial strength coated steel wire construction.

**User Installed Only**

Kit No.	Approx. Shipping Weight
AC11	1.8 lbs. each

*Shipping quantity (6) units per carton*

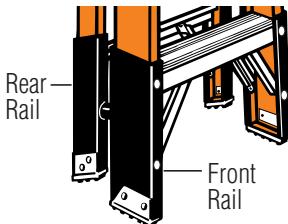**22****Fiberglass Rail Shields**

Designed to reinforce. Shields may also be used to repair ladder if rail cracks occur no higher than 3/4" below bottom rivet of bottom step or horizontal and all holes in the rail are intact. Rail shield(s) come with mounting hardware. (1 front and 1 rear kit per stepladder; 2 front kits needed for trestle ladder)

**User Installed Only**

Kit No.	Fits on Front Rail of Fiberglass Series	Approx. Shipping Wt.
22-2F	6000, T6000, 6200, 7300 T6200, 7400 (MK 13 & up) T7400 (MK 11 & up) P7400 (MK 13 & up) PT7400 (MK 4 & up) E7400 (MK 7 & up)	1.5 lbs.
22-3F	7400 (up through MK 12) T7400 (up through MK 10) P7400 (up through MK 12) PT7400 (up through MK 3) E7400 (up through MK 6)	1.5 lbs.
22-2R	Fits on Rear Rail of Fiberglass Series	Approx. Shipping Wt.
	6200, 7300, 7400, P7400	1.0 lb.

**PK76****Universal Auto-Closing Pail Shelf**

Spill-Proof®, rugged construction, easy to keep clean, automatically closes with stepladder, built-in rag rack. Pail shelf comes with mounting hardware and instructions.

**User Installed Only**

Kit No.	Fits on	Approx. Shipping Wt.
PK76-3	Fiberglass Stepladders & Aluminum 400 Series Stepladders	2.5 lbs.

*Shipping quantity (4) units per carton*

**Universal Pail Shelf**

Two piece, Spill-Proof®, rugged construction, aluminum arms, built-in rag rack. Pail shelf comes with mounting hardware and instructions.

**User Installed Only**

Kit No.	Fits on	Approx. Shipping Wt.
PK76-9	Fiberglass Stepladders & Aluminum 400 Series Stepladders	1.6 lbs.

*Shipping quantity (6) units per carton*

**76****Molded Plastic Pail Shelf**

Spill-Proof®, rugged construction, easy to keep clean, automatically closes with stepladder. Pail shelf comes with mounting hardware and instructions.

**User Installed Only**

Kit No.	Fits on Fiberglass Series	Approx. Shipping Wt.
76-2	6000 6200	2.5 lbs.

*Shipping quantity (2) units per carton*

**21****Grating Shoes****User Installed Only**

Kit No.	Fits on Series	Approx. Shipping Wt.
21-20	6200, P6200, 7300, 7400, P7400	1.5 lbs.
21-22	T6200, T7400, PT7400	1.5 lbs.

**AC24****Multipurpose Project Tray**

Project Tray conveniently holds tools, paints and supplies. Made for Werner multiladders and stepladders. Attaches easily; works at multiple heights; includes ToolLasso®.

**User Installed Only**

Kit No.	Fits on	Approx. Shipping Wt.
AC24	MT Series M1 Series Type IA (300 lbs.) & Type IAA (375 lbs.) Stepladders	2.8 lbs.

**40****Casters/Bracket Kits**

Heavy duty aluminum bracket with 4" caster allows 360° mobility of ladder. Soft rubber wheels are easy on floors; designed to roll over door thresholds. Casters may be used on all 4 legs; order 2 kits for this purpose. Two (2) casters/brackets come with mounting hardware and instructions.

Order models below as a "-4C" for factory installation.

**User Installed Only**

Kit No.	Fits on Series	Approx. Shipping Wt.
40-2HD	PT370 PT6000 PT7400 (MK 4 & up)	5.0 lbs.
40-4HD	PT7400 (up through MK 3)	5.0 lbs.

Note: Fits only ladder originally equipped with casters.

# EXTENSION LADDER ACCESSORIES

## LADDER JACKS

Recommended for use with 300 lbs. Type IA and 375 lbs. Type IAA extension ladders (OSHA and ANSI allow use with 250 lbs. Type I extension ladders also)

### User Installed Only



2-Rung Model AC10-14-02  
Short Body  
Accepts Stages to 14" width



2-Rung Model  
AC10-20-02  
Long Body  
Accepts Stages to  
20" width




3-Rung Model  
AC10-20-03  
Long Body  
Accepts Stages to  
20" width

- Lightweight, sturdy, easy to use
- Designed for quick field adjustments
- Mounts on either side of extension ladder

Kit No.	Approx. Shipping Wt.
AC10-14-02	15.0 lbs.
AC10-20-02	18.0 lbs.
AC10-20-03	20.0 lbs.

Shipping quantity  
2 per unit;  
(1) unit per carton



PLATFORM CLAMP SYSTEM  
Clamp secures platform to ladder jacks and ties supporting ladders together to help secure entire ladder jack system

## AC18MT

### Platform



Slip-resistant surface. Aluminum construction. Kicks out of way for easy climbing. 300 lbs. load capacity.

### User Installed Only

Kit No.	Fits on All	Approx. Shipping Wt.
AC18MT	MT Series	4.5 lbs.

## AC19

### Extension Ladder Covers



Helps prevent damage to support surfaces. Designed to 'snap' over extension ladder rail end caps. Resists paints, stains, thinners and solvents.

### User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
AC19-2	ALL Single and Extension Fiberglass and Aluminum Ladders (except 500, D500, D7136-2, D7140-2)	1.2 lbs. each

Shipping quantity  
1 pair per unit;  
(6) units per carton

## AC22

### Paint Can/Bucket Hanger



Holds one gallon can. Easy on and off. Right or left hand use. Plated steel.

### User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
AC22	ALL Extension Ladders	0.5 lbs. each

Shipping quantity  
(6) units per carton

## AC78

### Quickclick™ Stabilizer



Span: 44", Standoff :10"  
Requires no tools. Spring-loaded locking latch makes it easier and quicker to install/remove than any other stabilizer on the market. Mar-resistant rubber end caps protect work surface. Stabilizer comes with instructions. Paint can hook included.

## AC20

### Paint Can Hook



Includes 2 steel hooks with can openers. Holds one gallon can. 3/16" diameter.

### User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
AC20	ALL Extension Ladders	0.4 lbs. each

Shipping quantity  
2 per unit;  
(12) units per carton

### User Installed Only

Kit No.	For use on Singles and Extensions with	Approx. Shipping Wt.
AC78	1-1/4" round rungs 1-1/2" flat rungs 1-3/4" flat rungs 1-5/8" flat rungs	6.4 lbs.

**Not for use on  
Werner MultiLadders**

Shipping quantity  
(1) unit per carton

**AC96****Aluminum Stabilizer**

Span: 47", Standoff: 10"  
For use on aluminum ladders of all duty ratings. Attaches in minutes. Mar-resistant rubber caps protect work surface. Paint can hook included. Comes with mounting hardware and instructions.

**User Installed Only**

Kit No.	Fits on	Ladder Size	Approx. Shipping Wt.
AC96	Aluminum Series Extension Ladders with rails up to 3" x 1-3/16"	ALL	4.5 lbs.
D716		16'	
D1100		ALL	
D1200		ALL	
D1300		ALL	
D1500		ALL	
D500		20' - 24'	
MT		ALL	
M1		ALL	

**Ideal for stabilizing M1 MultiLadder when in scaffold or stairway positions**

Shipping quantity (6) units per carton

**PK70-1/APK70****Leveler with Base Units**

LeveLok® Ladder Leveler with 2 base attachments. Base unit stays attached to the ladder while leveler can be easily removed when not in use. Swivel shoe with ice pick on both ends. Leveler can be used on either side of ladder. Provides 8-1/2" of travel.

*LeveLok® is a registered trademark of the LeveLok Corporation.*

**User or Factory Installed**

Kit No.	Fits on	Approx. Shipping Wt.
PK70-1 and APK70	MT Series, D7100, D6200, 7100, D1300, D1500, 7800	8.5 lbs.

**PK70-2****Leveler Base Units**

LeveLok® Ladder Leveler 2 base attachments. Base units attach to the ladder to be used with LeveLok® Leveler supplied with PK70-1.

*LeveLok® is a registered trademark of the LeveLok Corporation.*

**User Installed Only**

Kit No.	Fits on	Approx. Shipping Wt.
PK70-2	MT Series, D7100, D6200, 7100, D1300, D1500, 7800	3.2 lbs.

**PK70-3****Leveler**

LeveLok® Ladder Leveler attaches to the base units supplied with PK70-1 and PK70-2.

*LeveLok® is a registered trademark of the LeveLok Corporation.*

**Approximate Shipping Weight**

6.2 lbs.

**PK80/APK80****Level-Master® Automatic Ladder Levelers**

Easily attaches to Werner fiberglass and aluminum extension ladders to level ladder on uneven surfaces.

Automatically adjusts up to 8-1/2". Easily levels and locks securely in place. The width of the ladder is increased by approximately 3-3/4". Note: The ladder's duty rating will remain the same after proper installation of leveler. Two (2) ladder levelers (one for each ladder rail) come with mounting hardware and instructions.

**71/A71****Padded Fixed V-Rung**

Slip-resistant rubber grip attached to steel v-rung for wood, metal or concrete poles. Pre-pierced holes in fiberglass top rails are provided to accept this accessory. V-rung assembly comes with mounting hardware and instructions.

**User or Factory Installed**

Kit No.	Fits on	Ladder Size
71-1	Fiberglass Series	ALL
	D6200-2 7100-2 D7100-2 7800	ALL ALL 16' - 32' ALL

Kit No.	Fits on	Ladder Size
71-4	Fiberglass Series	ALL

Factory Install No.	Fits on	Ladder Size
A71	Fiberglass Series	Up to 16'

Approx. Shipping Weight
71-1: 1.5 lbs.
71-4: 2.0 lbs.
Approx. Added Weight to Ladder for Factory Install
1.4 lbs.

Note: The original shoes of a D1500 series ladder may replace the steel shoes on a model PK80-2.

Approx. Shipping Weight
9.5 lbs.
Approx. Added Weight to Ladder for Factory Install
6.5 lbs.

Shipping quantity (1) unit per carton

### 72/A72

#### Adjustable Pole Strap



Adjustable strap design for all diameter poles. Slip-resistant rubber grip stitched to strap. Strap assembly comes with mounting hardware and instructions.

#### User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
72-2	D6200-2 7100-2 D7100-2	ALL Up to 16' 16' - 32'	1.3 lbs.
72-1	D6200-1 7100-1	ALL Up to 16'	1.3 lbs.

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A72	D6200-2 7100-1 7100-2 D7100-2	ALL Up to 16' ALL 16' - 32'

### A61

#### Combination Spur-Hoop Shoe



Combination aluminum rail shield bracket and spur-hoop shoe assembly.

#### Factory Installed Only

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A61	D6200-2 7100-2 D7100-2	16' - 32' ALL 16' - 32'

Approx. Added Weight to Ladder for Factory Install

3.0 lbs.

### 74/A74

#### Cable Hooks



Easily folds within side rails for storage. Cable hooks can be mounted above or below top rung. Consult Werner if using in conjunction with other accessories. Cable hooks come with mounting hardware and instructions.


#### User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
74-1	D6200-2 7100-1 7100-2 D7100-2	ALL Up to 16' ALL 16' - 32'	2.6 lbs.
74-2	D7100-2	36' - 40'	2.6 lbs.

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A74	D7100-2	ALL

### A78

#### Fly Section Shoes with Quick Disconnect



Combination aluminum rail shield bracket and hoop shoe with corrugated slip-resistant extruded rubber pad on fly section, allows use as a single or manhole ladder assembly.

#### Factory Installed Only

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A78	D6200-2 7100-2 D7100-2	ALL ALL 16' - 32'

Approx. Added Weight to Ladder for Factory Install

1.5 lbs.

### 81/A81

#### Adjustable Pole Lashes



For use with ladders having hoop style end caps only. Adjustable strap design for all diameter poles. Adjustable pole lash comes with mounting hardware and instructions.


#### User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
81-3	D7100-2	36' - 40'	1.5 lbs.

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A81	D6200-2 7100-1 7100-2 D7100-2	ALL ALL ALL ALL

### 86/A86

#### Spur Shoe



Plated steel spur for use on penetrable surfaces. Two (2) spur shoe assemblies, mounting hardware and instructions included.

#### User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size
86-1	D6200-2 7100-2, D7100-2 7100-1	16' - 32' 16' - 32' Up to 16'

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A86	D6200-1 D6200-2 7100-1 7100-2 D7100-2	ALL 16' - 32' Up to 16' ALL 16' - 32'

Approx. Shipping Weight

2.5 lbs.

Approx. Added Weight to Ladder for Factory Install

2.0 lbs.

### A83

#### Rubber Padded Shoe




Aluminum protective rail shield and rubber padded foot. Comes with two (2) padded shoes.

#### Factory Installed Only

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A83	D6200-1 D6200-2 7100-1 7100-2 D7100-2	ALL 16' - 32' Up to 16' ALL 16' - 32'

Approx. Added Weight to Ladder for Factory Install

2.2 lbs.

**91****Adjustable Pole Lash Assembly with Angle Brackets**

This assembly comes with brackets for independent use; wraps around pole. Strap design for all diameter poles. Adjustable pole lash assembly comes with two (2) angle brackets, mounting hardware and instructions.

**User Installed Only**

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
91-2	D6200-2 7100-2 D7100-2	ALL ALL 16' - 32'	2.0 lbs.

**89****Rail Wear Sleeves**

3' long replaceable plastic sleeves help avoid manhole rim damage to ladder rails. Two (2) sleeves, mounting hardware and instructions included.

**User Installed Only**

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
89-1	M7100-1 7100-1	ALL Up to 16'	2.5 lbs.

**92/A92****Cable Hook and V-Rung Assembly**

Functions as both cable hook and v-rung. For use in applications where the diameter of the pole at the point of support does not exceed 10". Steel v-rung has rubber pad for slip-resistant performance. One (1) cable hook and v-rung assembly, mounting hardware and instructions included.

**User or Factory Installed**

Kit No.	Fits on Fiberglass Series	Ladder Size
92-88	D6200-2 D8200-2EQ	16' - 40' 20' - 28'
92-89	7100-2, D7100-2 D7100-2LV	16' - 32' 20' - 32'
92-91	7100-1	8' - 16'

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A92	D6200-2 7100-2 7100-1 D8200-2EQ D7100-2 D7100-2LV	ALL ALL 8' - 16' ALL 16' - 32' 20' - 32'

## Approx. Shipping Weight

4.0 lbs.

## Approx. Added Weight to Ladder for Factory Install

3.0 lbs.

**94****Ladder-Cinch™**

Use as a quick tie down. Strap designed for all diameter poles. One (1) Ladder-Cinch™ assembly, storage bag and instructions.

**User Installed Only**

Kit No.	Fits All	Ladder Size	Approx. Shipping Wt.
94-2	Fiberglass Series Extension Ladders	ALL	1.0 lbs.

**97P****Adjustable True Grip® Stabilizer and Surface Protectors**

Span adjustment : 49", 57" or 65" Stand-off distance: 12" or 29-1/2" Rectangular stabilizer spans double windows. Quickly converts stand off distance for larger overhangs. Mounts quickly and easily. This comes with one (1) stabilizer, rubber pads, fleece bonnets, mounting hardware and instructions.

- Fits rail up to 3" x 1-3/16"

**User Installed Only**

Kit No.	Fits on Aluminum Series	Ladder Size
97P	D716-2 D1100 D1200 D1300 D1500 D500-2 D1700-2EQ D1800-2EQ	16' ALL ALL ALL ALL 20' - 24' ALL ALL

Note: Not to be used on Multi-Ladders

## Approx. Shipping Weight

9.5 lbs.

<b>SERIES/MODEL</b>	<b>STYLE</b>	<b>PAGE</b>
150B	Aluminum Step Stool	25
21	Grating Shoes	59
22	Fiberglass Rail Shields	59
244	Aluminum Utility Ladder	27
260	Aluminum Platform Ladder	27
2000	1-Person Decorator Plank	45
2300	2-Person Scaffold Plank	45
2400	2-Person Scaffold Plank	45
2500	2-Person Stage Platform	45
2600	2-Person Stage Platform	45
2700	2-Person Stage Platform	45
37	Display Rack	55
350	Aluminum Stepladder	26
360	Aluminum Stepladder	26
370	Aluminum Stepladder	22
3100	3-Person Stage Platform	45
3200	3-Person Stage Platform	45
40	Casters/Bracket Kits	59
40-1	Swivel Locking Caster	50
41-1	Swivel Base Plate	50
43-1	Guard Rail Holder	50
400	Aluminum Stepladder	21
4100	Narrow Span Scaffold Sections	49
4100-12	Narrow Span Scaffold Tower 12' Platform Height	48
4100-18	Narrow Span Scaffold Tower 18' Platform Height	48
4100-23	Narrow Span Scaffold Tower 23' Platform Height	48
4200	Wide Span Scaffold Sections	49
4200-12	Wide Span Scaffold Tower 12' Platform Height	48
4200-18	Wide Span Scaffold Tower 18' Platform Height	48
4200-23	Wide Span Scaffold Tower 23' Platform Height	48
55	End Cap Display	55
500-1	Aluminum Round Rung Straight Ladder	29
560-3	Aluminum Round Rung Extension Ladder	30
5300	Plywood Decked Aluma-Plank™	42
5500	Aluminum Decked Aluma-Plank™	42
5600	2-Piece Extruded Aluma-Board™	42
5900	Fiberglass Stepladder	11
6000	Fiberglass Stepladder	10
6002	Fiberglass Step Stool	9
6100	Fiberglass Stepladder	8
6200	Fiberglass Stepladder	7
6202	Fiberglass Step Stool	6
71/A71	Padded Fixed V-Rung	61
72/A72	Adjustable Pole Strap	62
74/A74	Cable Hooks	62
76	Molded Plastic Pail Shelf	59
7100	Fiberglass Round Rung Extension/Straight Ladder	14
7300	Fiberglass Stepladder	4
7400	Fiberglass Stepladder	1

<b>SERIES/MODEL</b>	<b>STYLE</b>	<b>PAGE</b>
7800	Fiberglass Combination Step/Extension Ladder	18
81/A81	Adjustable Pole Lashes	62
86/A86	Spur Shoe	62
89	Rail Wear Sleeves	63
91	Adjustable Pole Lash Assembly with Angle Brackets	63
92/A92	Cable Hook and V-Rung Assembly	63
94	Ladder-Cinch™	63
97P	Adjustable True Grip® Stabilizer and Surface Protectors	63
9500	All-Fiberglass Extension Ladder/Single Ladder	19
A	Aluminum Folding Attic Ladder	37
A61	Combination Spur-Hoop Shoe	62
A78	Fly Section Shoes with Quick Disconnect	60
A83	Rubber Padded Shoe	62
AA	Aluminum Universal Telescoping Attic Ladder	38
AC10-14-02	2-Rung Short Body Ladder Jack	60
AC10-20-02	2-Rung Long Body Ladder Jack	60
AC10-20-03	3-Rung Long Body Ladder Jack	60
AC11	Stepladder Hanger	59
AC18MT	Platform	60
AC19	Extension Ladder Covers	60
AC20	Paint Can Hook	60
AC22	Paint Can/Bucket Hanger	60
AC24	Multipurpose Project Tray	59
AC27-L	Lock-In Paint Cup Liner	57
AC27-P	Lock-In Paint Cup	57
AC50-JB-3	Lock-In Job Bucket	57
AC52-UB	Lock-In Utility Bucket	58
AC54-JC	Lock-In Job Caddy	58
AC56-UH	Lock-In Utility Hook	58
AC58-TL	Lock-In ToolLasso®	58
AC78	Quickclick™ Stabilizer	62
AC96	Aluminum Stabilizer	61
AL2210	Aluminum Universal Attic Ladder	37
AP-20-MP6	Aluminum Work Platform	40
ARB10-10	Adjustable Roof Bracket	60
BD	Scaffold Diagonal Brace	50
BH	Scaffold Horizontal Brace	50
BN	Scaffold Narrow Span Horizontal-Diagonal Brace	50
BOR	Scaffold Outrigger Brace	50
BW	Scaffold Wide Span Horizontal-Diagonal Brace	50
D1100	Aluminum D-Rung Extension Ladder	33
D1200	Aluminum D-Rung Extension Ladder	32
D1300	Aluminum D-Rung Extension Ladder	31
D1500	Aluminum D-Rung Extension Ladder/Straight Ladder	30
D1700-2EQ	Aluminum Extension Ladder with Integrated Leveling	32
D1800-2EQ	Aluminum Extension Ladder with Integrated Leveling	31
D500-2	Aluminum Flat Rung Extension Ladder	29
D5900	Fiberglass D-Rung Extension Ladder	16
D6000	Fiberglass D-Rung Extension Ladder	16

SERIES/MODEL	STYLE	PAGE
D6200	Fiberglass D-Rung Extension Ladder/Straight Ladder	15
D716-2	Aluminum D-Rung Extension Ladder	33
D7100	Fiberglass D-Rung Extension Ladder	14
D7100-2LV	Fiberglass D-Rung Ext. Ladder w/ Integrated Leveling	13
D8200-2EQ	Fiberglass Extension Ladder with Integrated Leveling	15
E7400	Fiberglass Extension Trestle Ladder	3
ESC	Built-In Fire Escape Ladder	40
ERT-N	End Rail and End Toe Board Assembly - Narrow	46
ERT-W	End Rail and End Toe Board Assembly - Wide	46
FNB-80	Scaffold Base End Frame	50
FNU	Scaffold Frames	50
FRB4510-10	Fixed Roof Bracket	60
FRO	Scaffold Rolling Outrigger Frame	50
FTP6200	Fiberglass Tripod Stepladder	9
FWB-80	Scaffold Base End Frame	50
FWG-42	Scaffold Guard Rail End Frame	50
FWU	Scaffold Frames	50
M1	Aluminum Folding MultiLadder	35
M7100	Fiberglass Manhole Ladder	18
MT	Aluminum Telescoping MultiLadder	35
OBCN00	Fiberglass Old Blue® Series Contractor's Jobstation™	5
OBEL00	Fiberglass Old Blue® Series Electrician's Jobstation™	4
OBPT00	Fiberglass Old Blue® Series Pipe Trade Jobstation™	5
OR-ADU	Scaffold Knee-Type Outriggers	50
P22W	Scaffold Board	50
P370	Aluminum Platform Ladder	23
P400	Aluminum Platform Ladder	22
P6200	Fiberglass Platform Ladder	8
P7400	Fiberglass Platform Ladder	2
PA200	Aluminum Extension Plank	42
PD22W	Scaffold Wood Deck with Access Door	50
PJ-6P	Aluminum Pump Jack 6' Aluminum Pole	43
PJ-12P	Aluminum Pump Jack 12' Aluminum Pole	43
PJ-18P	Aluminum Pump Jack 18' Aluminum Pole	43
PJ-24P	Aluminum Pump Jack 24' Aluminum Pole	43
PJ-100	Aluminum Pump Jack	43
PJ-ERN	Aluminum Pump Jack End Rail Kit (narrow)	43
PJ-ERW	Aluminum Pump Jack End Rail Kit (narrow)	43
PJ-PC	Aluminum Pump Jack Pole Connector	43
PJ-PF-4	Aluminum Pump Jack Pole Foot	43
PJ-SBF	Aluminum Pump Jack Foldable Support Brace	43
PJ-SBR	Aluminum Pump Jack Rigid Support Brace	43
PJ-SN	Aluminum Pump Jack Safety Net	43
PJ-WB	Aluminum Pump Jack Work Bench	43
PK70-1/APK70	Ladder Leveler with Base Units	61
PK70-2	Ladder Leveler Base Units	61
PK70-3	Ladder Leveler	61
PK76	Universal Pail Shelf	59
PK80/APK80	Level-Master® Automatic Ladder Levelers	61
PS-48	Steel Portable Scaffold	41

SERIES/MODEL	STYLE	PAGE
PT370	Aluminum Stockr's Ladder®	24
PT6000	Fiberglass Stockr's Ladder®	11
PT7400	Fiberglass Stockr's Ladder®	3
R102	Straight Ramp Kit	53
R301	Straight Ramps	53
R402	Arched Ramps	52
R522	Folding Arched Ramps	52
SOON16	Standard Angle Steel Warehouse Ladder	36
SOON24	Standard Angle Steel Warehouse Ladder	36
SOOR16	Standard Angle Steel Warehouse Ladder	36
SOOR24	Standard Angle Steel Warehouse Ladder	36
S7700	Fiberglass Interchangeable Parallel Sectional Ladder	20
S7900	Fiberglass Interchangeable Tapered Sectional Ladder	19
SF00R16	Safety Angle Steel Warehouse Ladder	36
SF00R24	Safety Angle Steel Warehouse Ladder	36
SGR-09	1-1/2" Square Guard Rail Cut Length - 108"	46
SGR-13	1-1/2" Square Guard Rail Cut Length - 156"	46
SH378	Aluminum Shelf Ladder	24
SNB	Snap-Up® Narrow Span Folding Scaffolds	49
SPF00	Fiberglass Posting Ladder	20
SPJ-100	Steel Pump Jack	44
SPJ-GRH	Steel Pump Jack Guard Rail Holder	44
SPJ-PA-4	Steel Pump Jack Pole Anchor	44
SPJ-SBF	Steel Pump Jack Foldable Support Brace	44
SPJ-WB	Steel Pump Jack Work Bench/Guard Rail Holder	44
SRS-72 & Accessories	6' Steel Rolling Scaffold	41
SSA00	Aluminum Step Stand	25
SSF00	Fiberglass Step Stand	6
SSP-47	Stanchion Post Assembly	46
STB-09	3-1/2" Toe Board Cut Length - 108"	46
STB-13	3-1/2" Toe Board Cut Length - 156"	46
SWB	Snap-Up® Wide Span Folding Scaffolds	49
T370	Aluminum Multi-Use Twin Stepladder	23
T372	Aluminum Twin Step Stool	25
T400	Aluminum Multi-Use Twin Stepladder	21
T6000	Fiberglass Multi-Use Twin Stepladder	10
T6200	Fiberglass Twin Stepladder	7
T6202	Fiberglass Twin Step Stool	6
T7400	Fiberglass Multi-Use Twin Stepladder	2
TN4A	Aluminum Toe Board Assemblies for 4100 Series	50
TPF00	Fiberglass Posting Ladder	20
TR101-S	Steel Removable Pickup Truck Rack	54
TR501-S	Steel Over Cab Pickup Truck Rack	54
TW370-30	Aluminum Portable Work Stand	25
TW4A	Aluminum Toe Board Assemblies for 4200 Series	50
TW6200	Fiberglass Portable Work Stand	6
VR101-W	Steel Van Rack	55
W	Wood Folding Attic Ladder	38
WH	Wood Folding Heavy Duty Attic Ladder	38
WNS	Nestable Stage	43



THE MARK OF **THE PRO**™

CORPORATE HEADQUARTERS

Werner Co.

93 Werner Road  
Greenville, PA 16125-9499

To contact us, please visit:  
[www.wernerladder.com/about/contact.php](http://www.wernerladder.com/about/contact.php)