


POLYKEN® 105C

Multi-Purpose Double-Coated Cloth Tape

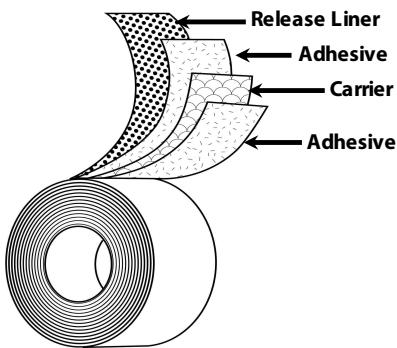

Carrier:	Cloth
Adhesive:	Rubber
Liner:	Blue LDPE or White Kraft Paper
Colors:	Natural (adhesive color)
Specifications:	Boeing BAC5034-4 Section 5.1.a(1)(a); BAC-5317 Rev F
Standard Sizes:	48mm x 23M, 48mm x 33M, 72mm x 23M

Applications

- Carpet hold-down for the convention and entertainment industry
- Hanging, seaming, and splicing poly sheeting
- General mounting and holding

Features

- Cloth reinforcement
- Natural rubber based adhesive
- Low VOC Content

Benefits

- Good strength and elongation for easy tear, application and removal
- Conformable and moisture resistant
- Clean removal from most surfaces
- High tack and aggressive adhesion for a secure bond
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	11.0 mils	0.279 mm	ASTM D-1000
Adhesion to Steel	40 oz/in	4.38 N/cm	PSTC-101
Tensile Strength	20 lb/in	35.03 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.