


## PREPACKAGED SWITCHES


### SIB02S

Enclosed Switch **20 Amp, 3 Position** Maintained, On/Off/On

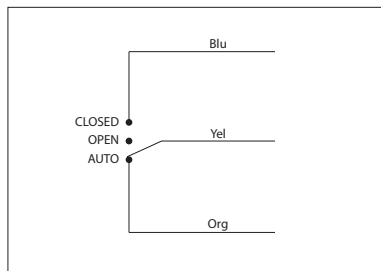


### SIB04S

Enclosed Switch **20 Amp, 2 Position** Maintained, On/On, **3 Wires**

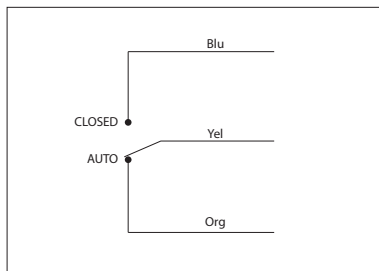



### SIB05S

Enclosed Switch **20 Amp, 2 Position** Maintained, On/Off, **2 Wires**

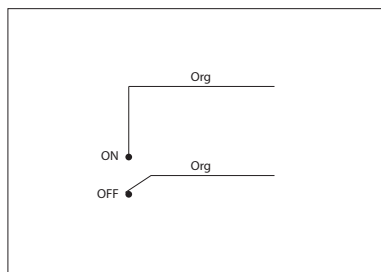

### SIBLS

Enclosed Switch **5 Amp, 30 Vac/dc, 3 Position** Maintained, On/Off/On **with LED Indicator**

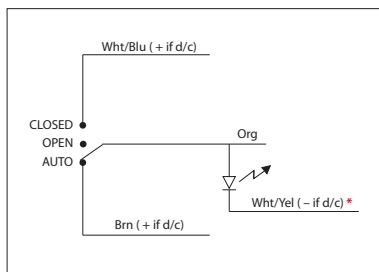

SIB02S-RD  
SIB04S-RD  
SIB05S-RD  
SIBLS-RD  
• Red housing

## SPECIFICATIONS

**Operating Temperature:** -30 to 140° F

**Humidity Range:** 5 to 95% (noncondensing)

**Dimensions:** 1.700" x 2.800" x 1.500"  
(w/ .500" NPT Nipple)

**Wires:** 16", 600V Rated

**Approvals:** UL Listed, UL916, C-UL

**Housing Rating:** UL Accepted for Use in Plenum,  
NEMA 1

### SIB02S, SIB04S, SIB05S

#### Switch Ratings:

20 Amp Resistive @ 277 Vac  
1110 VA Pilot Duty @ 277 Vac  
770 VA Pilot Duty @ 120 Vac  
20 Amp Ballast @ 277 Vac  
10 Amp Tungsten @ 120 Vac  
2 HP @ 277 Vac  
1 HP @ 120 Vac

#### SIBLS Switch Ratings:

5 Amp @ 30 Vac/dc

#### Notes:

- Switch position label can be custom printed according to your needs, simply consult factory
- Connection to Wht/Yel may be omitted if LED is not needed (SIBLS) \*