




P10004A & P1606A Shown


Volume Per Stroke► .30 - 4.56 cu.in.
 Weight► 9 - 20 lbs.
 Pressure Range► 750 - 12,000 psi

- Ideal for fixed applications when pumps need to be bolted in place.
- P1000A Series offers a swivel pump head for flexible fixturing.
- Wide range of operating pressures to select from.

P160A Series

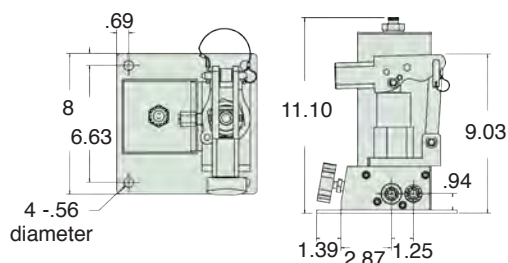

P1000A Series

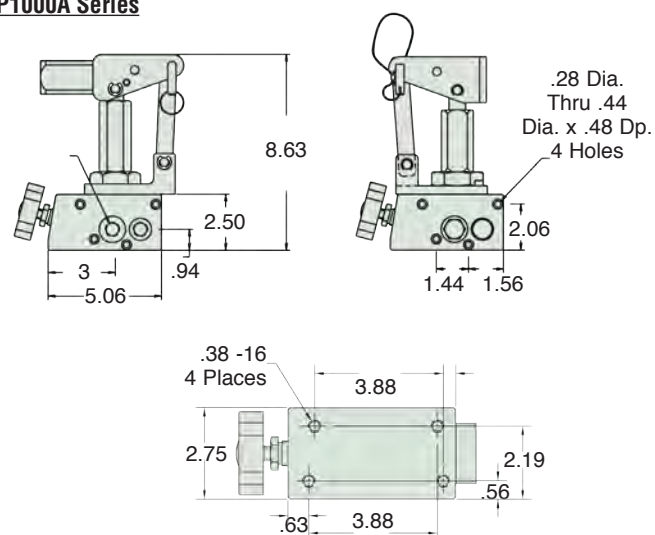

This P10006A is used as an auxiliary pump to position scaffolding for fabrication of the docking system for a new airline hangar. ▼



Model	Usable Reservoir Capacity (cu.in.)	Operating Pressure (PSI)	Volume per Stroke (cu.in.)	Maximum Handle Effort (lbs)	Weight (lbs)
P1603A	148	12,000	.30	108	20
P1604A	148	6,500	.53	104	20
P1606A	148	3,000	1.33	108	20
P10003A	---	12,000	.30	108	9
P10004A	---	6,500	.53	104	9
P10006A	---	3,000	1.33	108	9
P10008A	---	1,000	2.11	106	11
P100012A	---	750	4.56	79	11