

Eyesaver® Laboratory Single Lever Faucet with Integrated Eyewash

EYEWASH FEATURES:

- Independent water channel for eyewash
- Brass spindle valve
- Pull handle activation
- Aerated yellow plastic spray outlets with integral flow control and flip-top dust caps
- 2.6 GPM (9.8 L/min) @ 30 PSI flow rate
- 1/2" NPT male inlet



FAUCET FEATURES:

- Brass construction with polished chrome finish
- Gooseneck spout with independent water channel for faucet
- Single handle lever with color-coded index
- Ceramic Cartridge
- Adjustable center of 4" to 6"
- 2.2 GPM (8.3 L/min) flow rate
- 3/8" compression male threaded inlet hose

EYEWASH OPTIONS:

- NA: Non-aerated eyewash outlets

FAUCET OPTIONS:

- 8: 8" Gooseneck spout for faucet
- BO: 0.5 GPM (1.89 L/min) faucet flow control
- FP: foot pedal for faucet operation
(Not NSF 61/372 compliant)
- LF: 1.5 GPM (5.7 L/min) laminar faucet flow control
- ST: Serrated tip for faucet with vacuum breaker
(Not NSF 61/372 compliant)
- TW: Thermostatic mixing valve for tepid water during eyewash usage



Information continues on next page

STANDARDS:

- ANSI/ISEA Z358.1 certified
- ASME A112.18.1/CSA B125.1 certified
- IGC 272 certified
- NSF/ANSI 61 certified
- NSF 372 certified

WARRANTY:

Visit www.speakman.com for full product warranty information
• 3 Year Limited Warranty (commercial)

**ENSURE YOU ARE ANSI/ISEA Z358.1
Tepid Water Compliant**
by incorporating Speakman's 9.7 GPM
Thermostatic Mixing Valve.



- **-TW OPTION:** Add the -TW suffix to the part number, this product ships complete with the TMV and connections
- **STW-370:** Thermostatic Mixing Valve (valve only)
- **SEF-TW:** Thermostatic Mixing Valve with necessary connections for SEF products



All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-JULY 2018

Eyesaver® Laboratory Single Lever Faucet with Integrated Eyewash

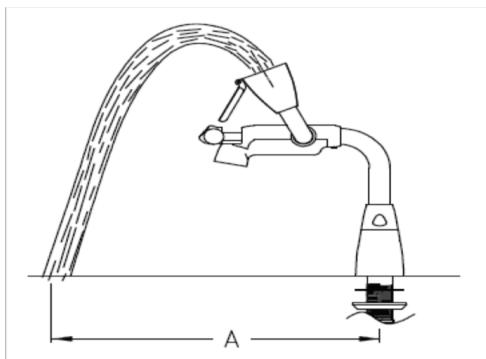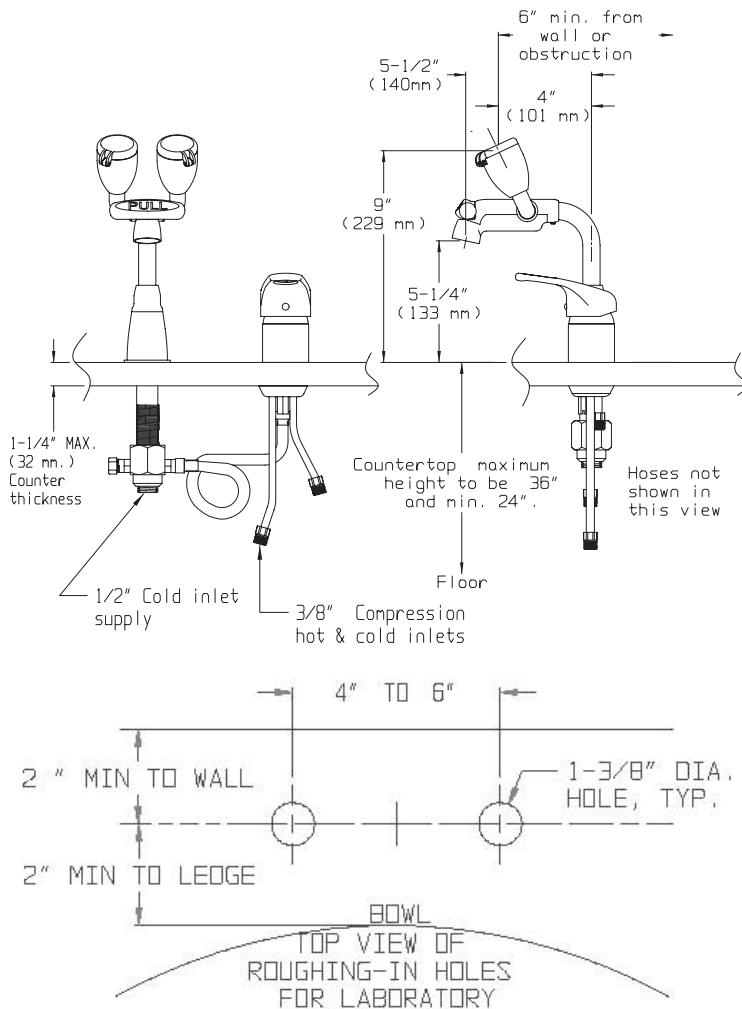

SEF-1800-CA-SL Spray Plume Length and Flow						
Flowing Pressure	30 psi	40 psi	50 psi	60 psi	70 psi	80 psi
Flow Rate	2.07 Bar	2.76 Bar	3.45 Bar	4.14 Bar	4.83 Bar	5.52 Bar
	2.9 gpm	3.1 gpm	2.9 gpm	2.9 gpm	2.9 gpm	2.9 gpm
Eyewash Distance	11.09 L/min	11.55 L/min	11.13 L/min	10.98 L/min	10.90 L/min	10.86 L/min
Plume "A"	13.5"	14.25"	14.25"	13.75"	13.75"	13.75"
	34.29 cm	36.2 cm	36.2 cm	34.93 cm	34.93 cm	34.93 cm

SEF-1800-CA-SL-8 Spray Plume Length and Flow						
Flowing Pressure	30 psi	40 psi	50 psi	60 psi	70 psi	80 psi
Flow Rate	2.07 Bar	2.76 Bar	3.45 Bar	4.14 Bar	4.83 Bar	5.52 Bar
	2.9 gpm	3.1 gpm	2.9 gpm	2.9 gpm	2.9 gpm	2.9 gpm
Eyewash Distance	11.09 L/min	11.55 L/min	11.13 L/min	10.98 L/min	10.90 L/min	10.86 L/min
Plume "A"	17.0"	18"	17.5"	17.0"	17.0"	17.0"
	43.18 cm	45.72 cm	44.45 cm	43.18 cm	43.18 cm	43.18 cm

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R:01-JULY 2018