



5G65H5G



5D73H10G




5G102H5G

WILLIAMS®

GAS ENGINE PUMP

- Gas pump will provide 10,000 psi hydraulic force at remote locations
- Industrial grade 5.5 hp Honda gas engine
- Manual control valve for use with single or double acting cylinders or tools
- Two speed pump designed for rapid cylinder advance
- Gas pump features a sturdy protective roll cage for use in the toughest environments

5G65H5G

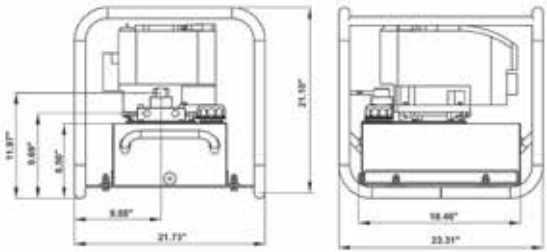

DIESEL ENGINE PUMP

- Diesel engine pumps will provide 10,000 psi at remote locations
- Industrial grade 5.5 hp Honda gas engine
- Locking solenoid control valve for use with single or double acting cylinders or tools
- Two speed pump designed for rapid cylinder advance
- Ideal for application when diesel fuel in remote environments is required
- Comes standard with electric start.

ENGINE PUMP SPECIFICATIONS

Motor Size (hp)	Usable Oil Capacity (gal)	Product Code	Pressure Rating (psi)		Oil Output Flow Rate (in³)		Valve Type	Valve Function	Rotation Speed	Sound Level
			1st Stage	2nd Stage	1st Stage	2nd Stage			(rpm)	(dBA)
5.5	5.0	5G55H5G (Gas)	700	10,000	427	100	3-way 3-position	Advance/Hold/Return	3600	93
10.2	10.0	5G102H5G (Gas)	700	10,000	600	200	4-way 3-position	Advance/Hold/Return	3600	93
7.3	10.0	5D73H10G (Diesel)	700	10,000	600	200	4-way 3-position	Advance/Hold/Return	3600	93